# 65-Ton Lowboy - HGG

1-YEAR WARRANTY

NATIONWIDE SERVICE

Powdercoated by GLOBE TRAILERS

## 65-Ton, 3 Axle, Detachable Non-Ground Bearing, Lowboy Trailer

This Specification is for a Model GTBN653-53-26-HGG, 65-Ton, 3 Axle, Detachable Non-Ground Bearing, Low-boy Trailer. Max Payload is 130,000 lbs in 12' Load Concentration and a Shipping Weight of 23,000 lbs +/- 3%.

| | | | |
|---|---|---|---|
| **Overall Length:** | 52' 8" (632") | **Main Beam:** | 16" fabricated T-1 "I" beam, 100,000 PSI. |
| **Overall Width:** | 8' 6" (102") | **Cross Member:** | 10" Jr. "I" beams on 12" Centers |
| **Gooseneck:** | 12' 0" (144") | **Side Rails:** | 16" fabricated T-I "I" beam, 100,000 PSI. |
| **Swing Clearance:** | 98" | **Rear Tail:** | 14" fabricated T-1 "I" beam, 100,000 PSI. |
| **Load well Length:** | 26' 0" (312") | **Axles:** | Three (3) ea 25,000 lbs capacity axles, 3rd axle lift. |
| **Rear Deck:** | 14' 8" (176") | **King Pin:** | 2" heavy duty |
| **5th Wheel Height:** | 50" | **Tires:** | 12 ea 275/70R x 22.5 "H" load range, steel belted radials. |
| **King Pin Setting:** | 16" | **Wheels:** | 12 ea. 8.25 x 22.5, 10 hole hub piloted steel disc wheels. |
| **Ground Clearance:** | 8" | **Brakes:** | 16.5 x 7 air brakes w/ spring parking brake on middle axle |
| **Deck Height:** | 24" | | Auto slack adjusters, & 2S1M ABS system on 2nd axle. |
| **Axle Spacing:** | 54" | | |

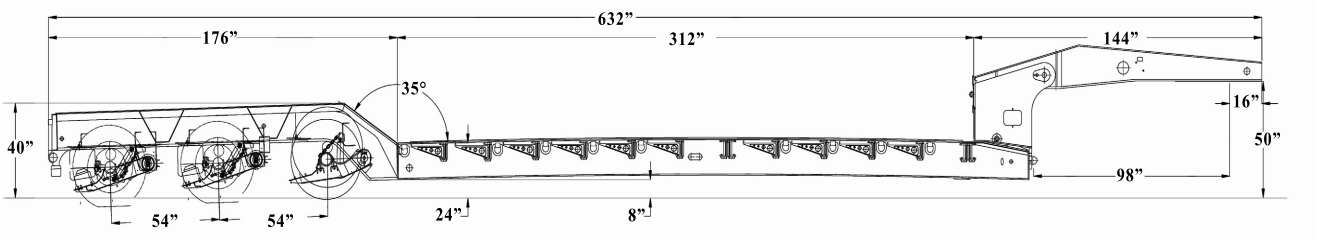


| | |
|---|---|
| **Suspension:** | 30K Cush air ride yoke mount suspension, 3rd axle air lift, with auto dump valve, & +/- 3 air ride adjustment. |
| **Front Ramps:** | 31" double hinged front loading flip ramps with grousers. |
| **Rear Tail Section:** | Open wheel with boom & bucket well, set up for 4th axle/stinger |
| **Electrical:** | 12-Volt electrical system with 7-way SAE connector, All lights are LED and mounted in rubber grommets to DOT standards. |
| **Hydraulics:** | Wet line hook-up on trailer for tractor PTO operation. |
| **Operating Pressure:** | Wet kit system requires 3000PSI at 10 GPM maximum flow to lift load at full capacity. |
| **Decking:** | 1 3/4" apitong flooring, open center, secured to frame with 5/16" self-tapping torque screws. |
| **Tie Downs:** | 16 ea "D" Ring tie downs 6 ea side on main deck, 2 on rear deck. |
| Outriggers: | 30 ea removable outriggers with double up front and double in middle of load well, 15 ea Side. |
| **Finish:** | Powdercoated to color of choice. |

LOWBOY