



LOWBOY, 40 TON
40LB577665



PRD-00577665 A.1



LOWBOY, 40 TON, GG

3 AXLE, DETACHABLE NON GROUND BEARING,
MAXIMUM PAYLOAD 80,000 LBS



HIGH QUALITY STEEL

NuStrength™
HIGH PERFORMANCE STEEL
NuStrength™ HR100

HIGH PERFORMANCE STEEL

ULTRA HIGH STRENGTH SHEET
100 KSI / 700 MPA SHEET STEEL COMPARISON

Melted and Manufactured in the USA

Constructed with T-1 100K PSI yield strength Steel. The High Tensile Steel ensures the designed camber is retained, and allows for a longer product service life.

20" DECK HEIGHT



With a standard deck height of 20", Globe Trailers have lower overall height, which allows taller loads to be hauled.

MULTI POSITION RIDE HEIGHT



Multi Position Ride Height options. Makes adjustments for various 5th wheel heights easy and allows for larger ground clearance or lower deck height.

ADDED SECURITY




Globe Trailers air lock with safety bar and spring extended pin ensures that the gooseneck locking pin will remain secured even if air pressure is lost.

LIGHTING SYSTEM



All Lighting is LED and mounted in rubber grommets to DOT standards.

CENTRALLY LOCATED FITTINGS

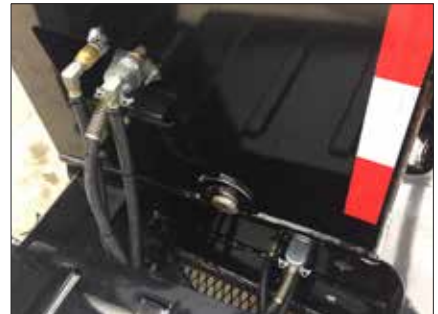

Air, electric and hydraulic (when applicable) fittings are all centrally located at the base of the gooseneck inside a bolster. This makes for quick and easy connect and disconnect. The fittings are protected from possible contact with equipment being loaded or unloaded.

STEMCO WHEEL WARRANTY



5 year wheel end warranty. Guardian wheel seals, Pro-Torq spindle nuts and Sentinel hub caps.

AIR BAGS




30K pound rated large diameter air bags are standard. This allows for lower operating pressure and higher capacity when needed.

UPPER TRANSITION RAMPS



Adjustable sliding transition ramps with wood covering for traction. Ramps are removable.

36" FLIP BOX & SET UP

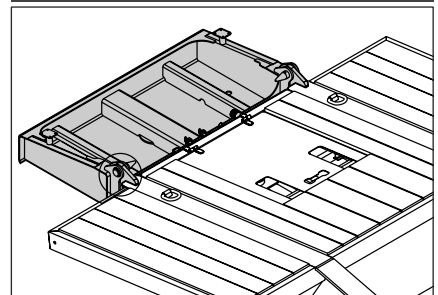

Flip box length options are available to achieve longer swing clearances when needed for longer truck frames or when coupling to single or multi-axle jeeps.

COLOR OPTIONS




Globe Trailers can powder coat to the color of your choice

COLOR CODED HOSES



Color coded air hoses allow for easy trouble shooting and maintenance.

INTEGRATED FRONT RAMPS

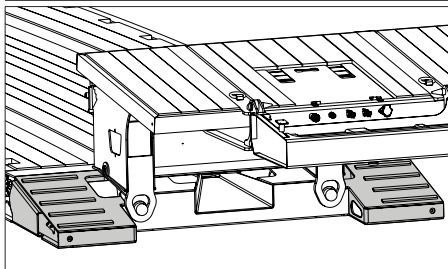

Low profile built-in integrated deck ramps.

WARRANTY



Globe Trailer's 10 year structural warranty on all lowboys is the best in the industry. Most competitors offer only a 5 year warranty. This shows how committed Globe Trailers is to it's customers.

DECKING OPTIONS



Oak: Standard.
Apitong: Best strength to weight ratios of natural woods.
Rumber: Composite which is impervious to fluids, mud, oil and UV rays.

WIDE LOAD




Premium aluminum with reflective material for high visibility.

PULLOUT OUTRIGGERS



Heavy duty, lightweight aluminum pullout outriggers.

GOOSENECK WITH DECK

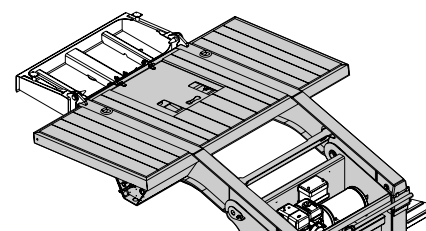

Full Deck Over Neck


POLYURETHANE VS RUBBER BUSHING



Reduced Maintenance	Increased Maintenance
Increased Trailer Lifetime	Needs Replacement
Increased Trailer Performance	Reduces Trailer Performance
Weather Resistant	Damaged from Weather



All Globe Trailers are 100% powder coat finished. The entire process takes place at Globe's manufacturing facility. This eliminates the possibility of contamination occurring in transit between process phases. The process starts with sandblasting the trailer to near white, preheating the trailer steel in a dedicated, gas fired oven to optimum bonding temperature and applying an electrostatically charged zinc rich primer. The trailer then goes back in the oven to allow the primer to bond. After the primer has bonded, a top coat chosen from one of Globe Trailers' 188 color options is applied before once more going back in the oven to cure. The result is a durable, easily cleaned finish that protects the trailer from corrosion and ensures a long service life.

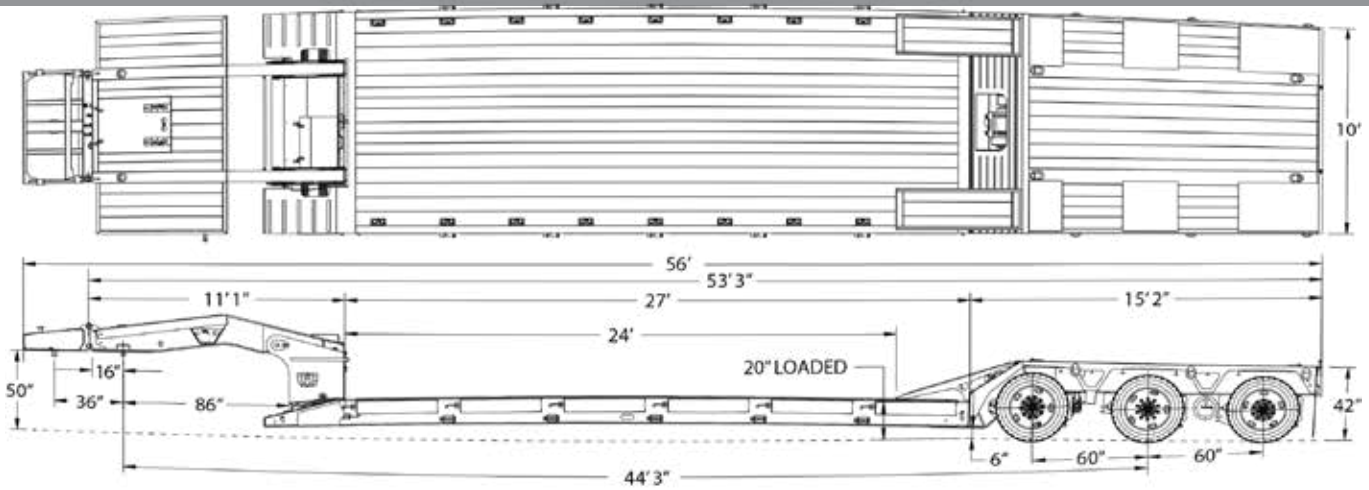

Trailer Model: GTBN352-48-24-HGG

Weight: Apx. : 28630 ± lbs

Overall Length	Overall Width	Gooseneck Length	Lower Deck Length	Lower Deck Height	Rear Deck Length	Rear Deck Height	Ground Clearance
56'	10'	11' 1"	24'	20" loaded	15' 2"	42"	6"

Main Deck	
Main Beam	14" T-1 Steel
Centers	60"
Side Rails	14" T-1 Steel
Crossmembers	10" & 4"
Spacing	12"
D-Rings	Pull Up style in main deck, inside of side flange
Outriggers	30" Aluminum Pull Out
Front Ramps	Integrated
Concentrated Load	80,000 lbs in 12'
Rear Deck	
Riser	90° Rear Bridge Ramp
Rear Well Style	Level - Flush Across Rear Deck
# of D-Rings	3 Each Side
(4) large d-rings added to top of rear deck on main beams; (2) at front (2) at rear	
Decking/Flooring	
Main Decking	1.75" Apitong Full Width
Wheel Covers	Steel Covered D-Plate
Well Decking	Apitong
Electrical	
Lights	LED Plus 2 - Rear Strokes
Connector	7 Way Connector
Safety Night Light Package w/ Battery	
Tires & Rims	
Tires	255/70R x 22.5 "H"
Rims	8.25 x 22.5 Hub Piloted All Aluminum

Axles, Suspension, & Running Gear	
# of Axles	3
Axle Spacing	60"
Axle Capacity	25,000 lbs
Brakes	16 1/2" x 7" - 25K
ABS	4S2M
Axle 1	Fixed Type 30/30 ABS
Axle 2	Fixed Type 30/30 ABS
Super Lift Type 30 Non-ABS	
Air Ride Suspension - 25K, Auto Dump	
Gooseneck	
King Pin Style	Removable
King Pin Setting	16"
Swing Clearance	86"
5th Wheel Height	50"
King Pin	2"
Ride Height	5-Position
Full Deck Over Neck, 36" Flip Box & Set Up	
36" Flip Box & Set Up	
Hydraulics	
Wet Line Kit - Wing Nut Connection	
Hydraulic connections to operate winch need to be in bolster on driver's side. Supply 10ft hydraulic "jumper lines"	
Finish	
Sandblast & Powder Coat	
Mud Flaps & Reflective Tape	
Flag Holders	

Dealer: