





PRD: 00082211 A.1



## DROP DECK, 20 TON 2 AXLE, MAXIMUM PAYLOAD 40,000 LBS



## DROP DECK, 20 TON

## **FEATURES & BENEFITS**





product service life.

**STEMCO WHEEL WARRANTY** 

## STEMCO' A Higher Standard of Performan

5 year wheel end warranty. Guardian wheel seals, Pro-Torq spindle nuts and Sentinel hub caps.

#### LIFT RINGS





Four (4) lift rings on top of deck for lifting aboard ships.

#### WHEEL OPTIONS



All Globe trailers come with standard HUB piloted disc wheels. Wheels are also available in all Aluminum or Outer Aluminum.



2 speed Landing Gear, allows for 160,000 lbs static load.

#### **COLOR OPTIONS**



Globe Trailers can powder coat to the color of your choice

#### **TIE DOWNS**



Four (4) tie downs located on underside of trailer for air transportability. In accordance with -IAW MIL-HDBK-1791.

#### **DECKING OPTIONS**




Oak: Standard. Apitong: Best strength to weight ratios of natural woods. Rumber: Composite which is impervious to fluids, mud, oil and UV rays.

### **DROP DECK, 20 TON**

## **FEATURES & BENEFITS**





All Lighting is LED and mounted in rubber grommets to DOT standards.

# **SUSPENSION**

Heavy Duty Tandem Spring Suspension.

#### **COLOR CODED HOSES**



Color coded air hoses allow for easy trouble shooting and maintenance.



Spare tire and holder located on underside of trailer deck.



Stake pockets located along the deck.

nance



DOT certified rear under ride bumper with high visibility reflective tape and rubber docking bumpers.

#### **POLYURETHANE VS RUBBER BUSHING**



Reduced Maintenance	Increased Maintenance
Increased Trailer Lifetime	Needs Replacement
Increased Trailer Performance	Reduces Trailer Performanc
Weather Resistant	Damaged from Weather




All Globe Trailers are 100% powder coat finished. The entire process takes place at Globe's manufacturing facility. This eliminates the possibility of contamination occurring in transit between process phases. The process starts with sandblasting the trailer to near white, preheating the trailer steel in a dedicated, gas fired oven to optimum bonding temperature and applying an electrostatically charged zinc rich primer. The trailer then goes back in the oven to allow the primer to bond. After the primer has bonded, a top coat chosen from one of Globe Trailers' 188 color options is applied before once more going back in the oven to cure. The result is a durable, easily cleaned finish that protects the trailer from corrosion and ensures a long service life.





## DROP DECK, 20 TON 20DP082211

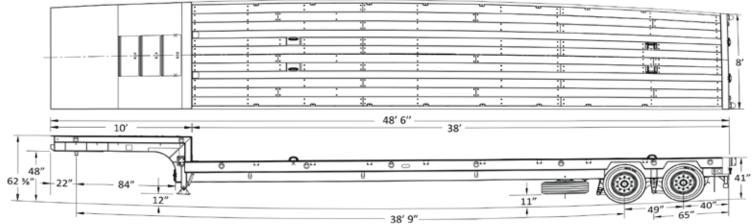

#### Trailer Model: GTFS402-48-38 Weight: Apx. 14930 ± lbs

Overall Length	Overall Width	Gooseneck Length	Swing Clearance	5th Wheel Height	Load Well Length	Load Well Height
48' 6"	8′	10'	84″	48"	38′	41" Max
Main Deck			Axles, Suspension, & Running Gear			
Main Beam	100 KSI flanges and webs.			# of Axles	2	
Centers	36"			Axle Spacing	49"	
				Axle Capacity	25,000lbs	
Side Rails	Structural Steel Channel			Brakes	16 ½" x 7" - 25K	
Crossmembers	Jr. I-Beams on, 24" Centers.			ABS	2S1M	
D-Rings	11 Per Side			Axle 1	Fixed Type 30/30 ABS	
Stake Pockets	8 Per Side			Axle 2	Fixed Type 30/30 NON ABS	
Neck	Full Width,	Steel Covered		Spring Ride Suspension.		
Decking/Flooring			2-Speed Landing Gear.			
			Gooseneck			
Main Decking 2" (Oak Standard)		King Pin Style	Fixed			
Electrical			King Pin Setting	22"		
Lights	LED Plus 2 - Rear Strobes		Swing Clearance	84"		
Connector	7 Way Connector		5th Wheel Height	48"		
Tires & Rims			King Pin	2" Heavy Duty		
			Finish			
Tires	255/70R x 2	2.5 "H"		Sandblast & Powder Coat		
Rims	8.25 x 22.5	Hub Piloted Steel		Mud Flaps & Reflective Tape		
Options		Flag Holders				
Lockable Tool Box		Dealer:				
Spare Tire wit	th Carrier, rem	ovable, mounted ur	nder the deck			
		ovided 20' long Air ti DBK-1791 Manuals I	•			