











FLAT BED, 20 TON 2 AXLE, MAXIMUM PAYLOAD 40,000 LBS



FEATURES & BENEFITS



HIGH QUALITY STEEL



Constructed with T-1 100K PSI yield strength Steel. The High Tensile Steel ensures the designed camber is retained, and allows for a longer product service life.

REAR BUMPER



DOT certified rear under ride bumper with high visibility reflective tape and rubber docking bumpers.

WHEEL OPTIONS



All Globe trailers come with standard HUB piloted disc wheels. Wheels are also available in all Aluminum or Outer Aluminum.

STEMCO WHEEL WARRANTY



5 year wheel end warranty. Guardian wheel seals, Pro-Torq spindle nuts and Sentinel hub caps.

SUSPENSION



Heavy Duty tandem suspension.

WEB WINCHES



Web winches can be located on either side. Used to secure loads and objects on the trailer.

LOCKABLE TOOL BOX




Optional Lockable Tool Box Mounted Underside of Main Deck, 24" x 24" x 48" Steel, can be located on either side.

HEAD RACK



Optional detachable steel bulkhead, 48" high with optional work lights.



DECKING OPTIONS



Oak: Standard.

Apitong: Best strength to weight ratios of natural woods.

Rumber: Composite which is impervious to fluids, mud, oil

and UV rays.

FEATURES & BENEFITS



POLYURETHANE VS RUBBER BUSHING




Reduced Maintenance	Increased Maintenance
Increased Trailer Lifetime	Needs Replacement
Increased Trailer Performance	Reduces Trailer Performance
Weather Resistant	Damaged from Weather



All Globe Trailers are 100% powder coat finished. The entire process takes place at Globe's manufacturing facility. This eliminates the possibility of contamination occurring in transit between process phases. The process starts with sandblasting the trailer to near white, preheating the trailer steel in a dedicated, gas fired oven to optimum bonding temperature and applying an electrostatically charged zinc rich primer. The trailer then goes back in the oven to allow the primer to bond. After the primer has bonded, a top coat chosen from one of Globe Trailers' 188 color options is applied before once more going back in the oven to cure. The result is a durable, easily cleaned finish that protects the trailer from corrosion and ensures a long service life.

RUB RAIL



2 ½" rolled formed steel. 6" Structural Channel @ 6.5 lbs/ft, 5/16" Thick Stake Pockets 1 5/8" x 3 ½" x ¼", 24" O/C, ¼" x 3" Rub rail.

WIDE TURN SIGNALS



Optional wide turn indicators available.

LIGHTING SYSTEM



All Lighting is LED and mounted in rubber grommets to DOT standards.

COLOR CODED HOSES



Color coded air hoses allow for easy trouble shooting and maintenance.

LANDING GEAR



2 speed Landing Gear, allows for 160,000 lbs static load.

COLOR OPTIONS




Globe Trailers can powder coat to the color of your choice.





FLAT BED, 20 TON

20FB491824

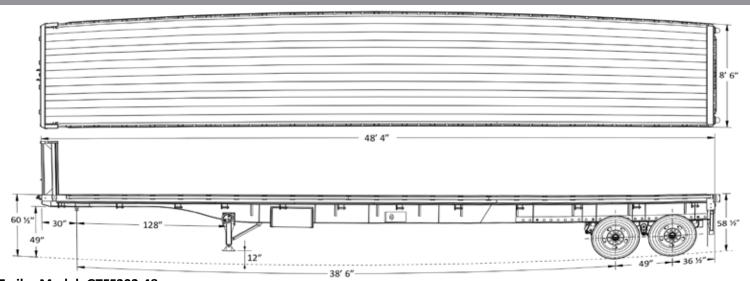

Trailer Model: GTFF202-48 Weight: Apx.: 15440 ± lbs

Overall Length	Overall Width	5th Wheel Height	Front Deck Height	Rear Deck Height	Ground Clearance
48′ 4″	8′ 6″	49" (Unloaded)	60 ½"	58 ½"	12"

Main Deck					
Main Beam	100 KSI flanges and webs.				
Centers	44" Standard				
Side Rails	6" Channel				
Crossmembers	4" Jr. I-Beams				
Stake Pockets	24" center, both sides, front & rear, with rubrails.				
Spacing	Spacing 12"				
Decking/Flooring					
Main Decking 1 3/8"		Apitong Flooring			
Electrical					
Lights	LED Plus 2 - Rear Strobes				
Connector	tor 7 Way SAE Connector				
Tires & Rims					
Tires 11R		x 22.5 "H"			
Rims 8.25		x 22.5 Hole Hub Piloted Steel			
King Pin and Swing Clearance					
King Pin Style		Fixed			
King Pin Setting		30"			
5th Wheel Height		49"			
King Pin		2" Heavy Duty			
Swing Clearance		128"			

Axles, Suspension, & Running Gear				
# of Axles	2			
Axle Spacing	49"			
Axle Capacity	25,000lbs			
Brakes	16 ½" x 7" - 25K			
ABS	2S1M			
Axle 1	Fixed Type 30/30 ABS			
Axle 2	Fixed Type 30/30			
Spring Sliding Suspension				
2-Speed Landing Gear				
Options				
Wide Turn Indicators				
Head Rack Fixed, Hubometer, Tool Box				
Web Winches 12 with straps driver side				
Finish				
Sandblast & Powder Coat				
Mud Flaps & Reflective Tape				