





PRD : 00129068 A.1



TAG-A-LONG, 20 TON 2 AXLE, MAXIMUM PAYLOAD 40,000 LBS



TAG-A-LONG, 20 TON

FEATURES & BENEFITS





WHEEL OPTIONS



All Globe trailers come with standard HUB piloted disc wheels. Wheels are also available in all Aluminum or Outer Aluminum.

TIE DOWNS



D-rings on each side of the deck make it easier to secure loads to the trailer.



Lockable tool box with anti theft provisions available.

DECKING OPTIONS



Oak: Standard. Apitong: Best strength to weight ratios of natural woods. Rumber: Composite which is impervious to fluids, mud, oil and UV rays.



3" Pintle eye, with 4 adjustable height positions, with 2 heavy duty safety chains and grab hooks.



Adjustable with spring assist and safety bar.



25,000 lbs capacity axles.

SUSPENSION



Heavy duty tandem-axle spring ride suspension.

LANDING GEAR



2 speed Landing Gear, allows for 160,000 lbs static load.

TAG-A-LONG, 20 TON

FEATURES & BENEFITS



LIGHTING SYSTEM



All Lighting is LED and mounted in rubber grommets to DOT standards.

BEAVER TAIL



The Beavertail is an angled extension on the rear frame. This makes rear loading more convenient.

WARRANTY



Globe Trailer's 5 year structural warranty on all lowboys is the best in the industry. Most competitors offer only a 5 year warranty. This shows how committed Globe Trailers is to it's customers.

COLOR OPTIONS

Globe Trailers can powder coat to the color of your choice.

COLOR CODED HOSES



Color coded air hoses allow for easy trouble shooting and maintenance.

STEMCO WHEEL WARRANTY



5 year wheel end warranty. Guardian wheel seals, Pro-Torq spindle nuts and Sentinel hub caps.

POLYURETHANE VS RUBBER BUSHING






All Globe Trailers are 100% powder coat finished. The entire process takes place at Globe's manufacturing facility. This eliminates the possibility of contamination occurring in transit between process phases. The process starts with sandblasting the trailer to near white, preheating the trailer steel in a dedicated, gas fired oven to optimum bonding temperature and applying an electrostatically charged zinc rich primer. The trailer then goes back in the oven to allow the primer to bond. After the primer has bonded, a top coat chosen from one of Globe Trailers' 188 color options is applied before once more going back in the oven to cure. The result is a durable, easily cleaned finish that protects the trailer from corrosion and ensures a long service life.





TAG-A-LONG, 20 TON 20TA129068

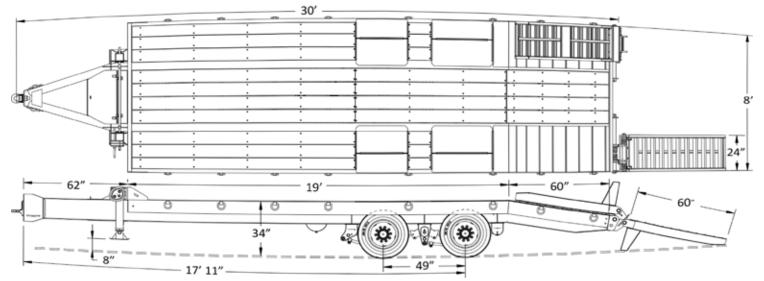

Trailer Model: GTTU202-30-19

Overall Length	Overall Width	Deck Length	Dec	Deck Height B 34"		avertail Length	Drawbar Length
30′	8'	19' TA				60"	62"
Frame				Axles, Suspension, & Running Gear			
Main Beam	14 x 6.75 @ 30#			# of Axles		2	
Main Beam Centers	39"			Axle Spacing		49"	
Side Rails	8" Channel			Axle Capacity		25,000 lbs	
Crossmembers	4″ IB			Brakes		12 ¼" x 7 ½" - 25K	
Spacing	12"			ABS		4S2M	
Bumper	10" Channel						
Header	8" Channel			Axle 1		Fixed Type 30/30 ABS	
# of D-Rings	6 Ea Side			Axle 2		Fixed Type 30/30 ABS	
Drawbar				Suspension		Spring Ride 25K	
Tool Box	Lockable w/ Steel Grating			Landing Gear		Dual 2-Speed 50K Drop Leg Jacks - 17"	
Hitch Type	3" Pintle Hitch			Tires & Rims			
Safety Chains with Hooks				Tires		215/75R x 17.5 "H"	
Beavertail & Ramps				Rims		6.75 X 17.5 Hub Piloted Steel	
of D-Rings 2 Ea Side				Spare Tire Mount			
Beavertail 60"				Spare Tire & Rim			
Rear Ramps 24 x 60				Finish			
Spring Assist				SandBlasted and Powder Coat (Safety Yellow)			
Cleated				Mud Flaps & Reflective Tape			
Electrical							
Lights	LED S/T/T Only			Flag Holders			
Connector	7 Way Connector			Dealer:			
	Decking/Flooring						
Main Decking	2" N, Oak Full Wi	dth					
Beavertail Flooring	Steel Covered D-F	Plate w/Grousers					