







PRD: 00599322 A.1



TAG-A-LONG, 20 TON 2 AXLE, MAXIMUM PAYLOAD 40,000 LBS



FEATURES & BENEFITS



HIGH QUALITY STEEL



Constructed with T-1 100K PSI yield strength Steel. The High Tensile Steel ensures the designed camber is retained, and allows for a longer product service life.

WHEEL OPTIONS



All Globe trailers come with standard HUB piloted disc wheels. Wheels are also available in all Aluminum or Outer Aluminum.

TIE DOWNS



D-rings on each side of the deck make it easier to secure loads to the trailer.

HYDRAULIC RAMPS



Hydraulic ramp upgrade available for easier use.

BEAVER TAIL



The Beavertail is an angled extension on the rear frame. This makes rear loading more convenient.

AXLES



25,000 lbs capacity axles.

LANDING GEAR



2 speed Landing Gear, allows for 160,000 lbs static load.

COLOR OPTIONS




Globe Trailers can powder coat to the color of your choice.

LIGHTING SYSTEM



All Lighting is LED and mounted in rubber grommets to DOT standards.

STEMCO WHEEL WARRANTY



5 year wheel end warranty. Guardian wheel seals, Pro-Torq spindle nuts and Sentinel hub caps.

SUSPENSION




Heavy duty tandem-axle spring ride suspension.

FEATURES & BENEFITS



DECKING OPTIONS



Oak: Standard.
Apitong: Best strength to weight ratios of natural woods.
Rumber: Composite which is impervious to fluids, mud, oil and UV rays.

TOOL BOX



Lockable tool box with anti theft provisions available.

HEAVY DUTY PINTLE EYE



3" Pintle eye, with 4 adjustable height positions, with 2 heavy duty safety chains and grab hooks.

WARRANTY



Globe Trailer's 5 year structural warranty on all lowboys is the best in the industry. Most competitors offer only a 5 year warranty. This shows how committed Globe Trailers is to it's customers.

COLOR CODED HOSES



Color coded air hoses allow for easy trouble shooting and maintenance.

POWER PACK



Power pack option for rear hydraulic ramps.

POLYURETHANE VS RUBBER BUSHING



Reduced Maintenance	Increased Maintenance	
Increased Trailer Lifetime	Needs Replacement	
Increased Trailer Performance	Reduces Trailer Performance	
Weather Resistant	Damaged from Weather	




All Globe Trailers are 100% powder coat finished. The entire process takes place at Globe's manufacturing facility. This eliminates the possibility of contamination occurring in transit between process phases. The process starts with sandblasting the trailer to near white, preheating the trailer steel in a dedicated, gas fired oven to optimum bonding temperature and applying an electrostatically charged zinc rich primer. The trailer then goes back in the oven to allow the primer to bond. After the primer has bonded, a top coat chosen from one of Globe Trailers' 188 color options is applied before once more going back in the oven to cure. The result is a durable, easily cleaned finish that protects the trailer from corrosion and ensures a long service life.





TAG-A-LONG, 20 TON

20TA599322

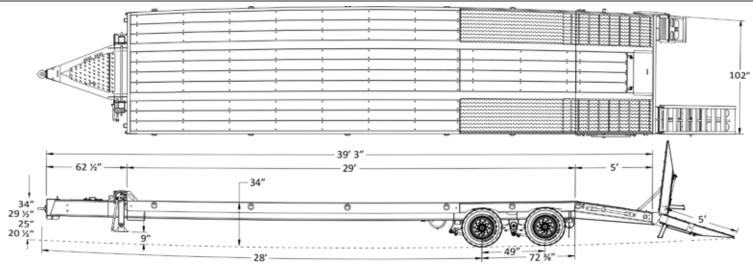

Trailer Model: GTTU202-40-29 Weight: Apx. : 10870 ± lbs

Overall Length	Overall Width	Deck Length	Deck Height	Beavertail Length	Drawbar Length
39′ 3″	8′ 6″	29' TA	34"	60"	62 ½"

Frame						
Main Beam	14 x 6.75 @ 30#					
Main Beam Centers	39"					
Side Rails	8" Channel					
Crossmembers	4" Jr. I Beams					
Spacing	12"					
Bumper	10" Channel					
Header	8" Channel					
# of D-Rings	6 Ea Side					
Drawbar						
Tool Box	Lockable w/ Steel Grating					
Hitch Type	3" Pintle Hitch					
Safety Chains with Hooks						
Beavertail & Ramps						
Beavertail 60"						
Rear Ramps 24" x 60"						
Hydraulic, Cleated						
Electrical						
Lights	LED S/T/T Only					
Connector	7 Way Connector					
Decking/Flooring						
Main Decking	1.75", Oak Full Width					
Beavertail Flooring	Steel Covered S-Plate w/Grousers					
	Clab a Tarillana I 2101 FOUR Assa Daise					

Axles, Suspension, & Running Gear				
# of Axles	2			
Axle Spacing	49"			
Axle Capacity	25,000 lbs			
Brakes	12 ¼" x 7 ½" - 25K			
ABS	2S1M			
Axle 1	Fixed Type 30/30 Non-ABS			
Axle 2	Fixed Type 30/30 ABS			
Suspension	Spring Ride 25K			
Landing Gear	Dual 2-Speed 50K Drop Leg Jacks			
Tires & Rims				
Tires	235/75R x 17.5 "H"			
Rims	6.75 X 17.5 Hub Piloted Steel			
Finish				
Sandblast and Powder Coat				
Mud Flaps & Reflective Tape				
Flag Holders				

Dealer:			