



DROP DECK, 40 TON
40DP110342



PRD-00110342 A.1



DROP DECK, 40 TON
3 AXLE, DETACHABLE NON GROUND BEARING,
MAXIMUM PAYLOAD 80,000 LBS



HIGH QUALITY STEEL



Constructed with T-1 100K PSI yield strength Steel. The High Tensile Steel ensures the designed camber is retained, and allows for a longer product service life.

LANDING GEAR



2 speed Landing Gear, allows for 160,000 lbs static load.

STEMCO WHEEL WARRANTY



5 year wheel end warranty.
Guardian wheel seals, Pro-Torq spindle nuts and Sentinel hub caps.

BEAVER TAIL



The Beavertail is an angled extension on the rear frame. This makes rear loading more convenient.

TRACK GUIDES



Track Guides on Deck with multiple position options.

SUSPENSION



Heavy Duty Tridem suspension.

REAR RAMP



Adjustable with spring assist and safety bar.

WARRANTY



Globe Trailer's 10 year structural warranty on all lowboys is the best in the industry. Most competitors offer only a 5 year warranty. This shows how committed Globe Trailers is to it's customers.

COLOR OPTIONS




Globe Trailers can powder coat to the color of your choice

DECKING OPTIONS



Oak: Standard.
Apitong: Best strength to weight ratios of natural woods.
Rumber: Composite which is impervious to fluids, mud, oil and UV rays.

MOUNTED SPARE TIRE

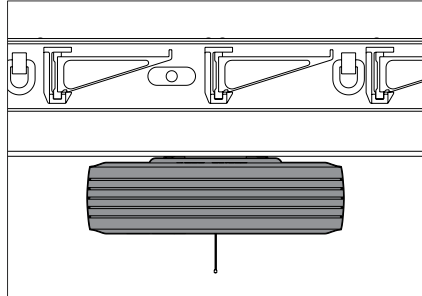

Optional spare tire that mounts securely below the deck.

LIGHTING SYSTEM



All Lighting is LED and mounted in rubber grommets to DOT standards.

LIFTING LUGS



Lifting Lugs for Air Lift.

COLOR CODED HOSES



Color coded air hoses allow for easy trouble shooting and maintenance.


POLYURETHANE VS RUBBER BUSHING



Reduced Maintenance	Increased Maintenance
Increased Trailer Lifetime	Needs Replacement
Increased Trailer Performance	Reduces Trailer Performance
Weather Resistant	Damaged from Weather



All Globe Trailers are 100% powder coat finished. The entire process takes place at Globe's manufacturing facility. This eliminates the possibility of contamination occurring in transit between process phases. The process starts with sandblasting the trailer to near white, preheating the trailer steel in a dedicated, gas fired oven to optimum bonding temperature and applying an electrostatically charged zinc rich primer. The trailer then goes back in the oven to allow the primer to bond. After the primer has bonded, a top coat chosen from one of Globe Trailers' 188 color options is applied before once more going back in the oven to cure. The result is a durable, easily cleaned finish that protects the trailer from corrosion and ensures a long service life.

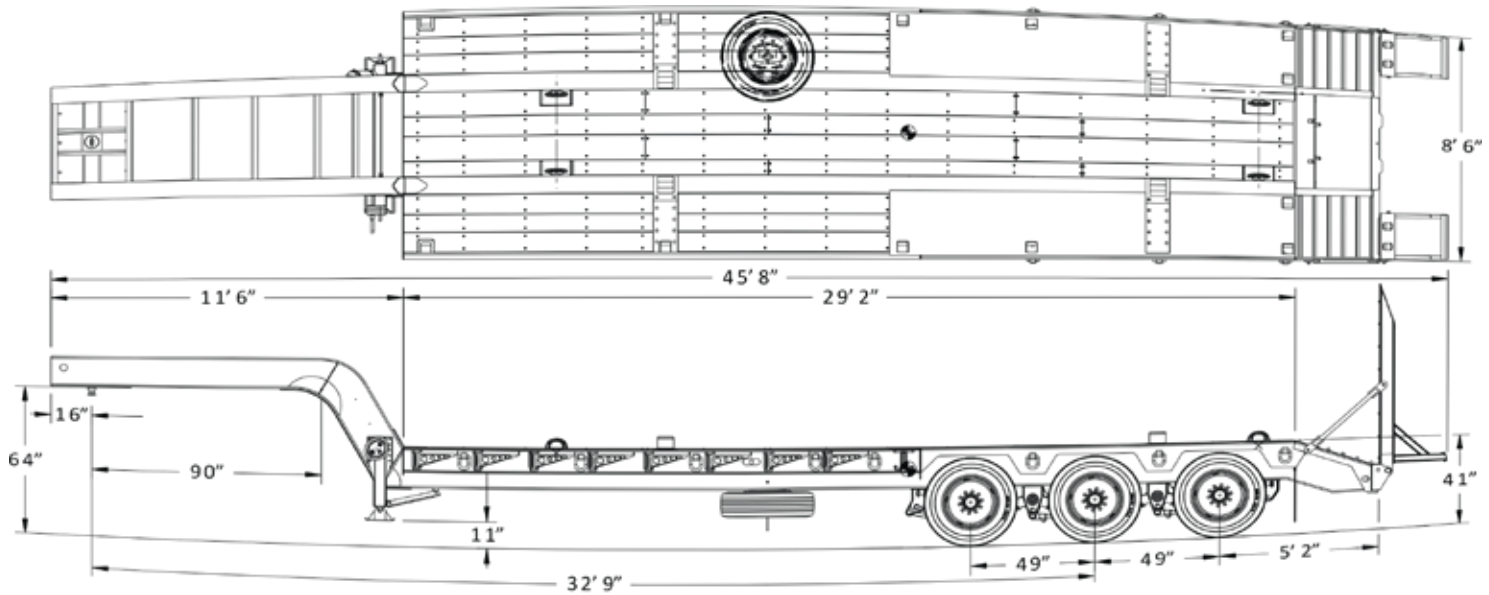

Trailer Model: GTFV403-46-29

Weight: Apx. : 18000 ± lbs

Overall Length	Overall Width	Gooseneck Length	Lower Deck Length	Rear Deck Height	Ground Clearance
45' 8"	8' 6"	11' 6"	29' 2"	41"	11"

Main Deck	
Main Beam	16" @ 57#
Centers	42" Standard
Side Rails	10" Channel
Crossmembers	10" on 24" Centers.
Tie Downs	8 D-Rings, each side on deck. 4 Air Lift D-Rings on deck. 12 Stake Holder on deck.
Track Guides on Deck.	
Concentrated Load	80,000 lbs in 12'
Decking/Flooring	
Main Decking	1.75" Nominal Apitong Flooring
Wheel Covers	Steel Covered D-Plate
Rear Deck Options	
Beavertail 33", Steel Covered D-Plate with traction cleates, with a toolbox.	
Rear Ramps 78" x 20" Spring, Cleated	
Electrical	
Lights	LED Plus 2 - Rear Strobes
Connector	7 Way SAE Connector
Tires & Rims	
Tires	255/70R x 22.5 "H"
Rims	8.25 x 22.5, 10 hole-hub piloted steel disc wheels
Optional	Spare tire & rim mounted below deck.

Axles, Suspension, & Running Gear	
# of Axles	3
Axle Spacing	49"
Axle Capacity	25,000 lbs
Brakes	16 ½" x 7" - 25K
ABS	4S2M
Axle 1	Fixed Type 30/30 ABS
Axle 2	Fixed Type 30/30 ABS
Axle 3	Fixed Type 30/30 ABS
Spring ride suspension.	
2-Speed Landing Gear.	
Gooseneck	
King Pin Style	Fixed
King Pin Setting	16"
Swing Clearance	90"
5th Wheel Height	64"
King Pin	2"
Finish	
Sandblast & Powder Coat	
Mud Flaps & Reflective Tape	
Flag Holders	

Dealer: