



**DROP DECK, 40 TON**  
**40DP677406**



PRD: 00677406 A.1



**DROP DECK, 40 TON**  
2 AXLE, MAXIMUM PAYLOAD 80,000 LBS



## HIGH QUALITY STEEL



Constructed with T-1 100K PSI yield strength Steel. The High Tensile Steel ensures the designed camber is retained, and allows for a longer product service life.

## RUB RAIL



2 1/2" rolled formed steel. 6" Structural Channel @ 6.5 lbs/ft, 5/16" Thick Stake Pockets 1 5/8" x 3 1/2" x 1/4", 24" O/C, 1/4" x 3" Rub rail.

## WARRANTY



Globe Trailer's 10 year structural warranty on all lowboys is the best in the industry. Most competitors offer only a 5 year warranty. This shows how committed Globe Trailers is to it's customers.

## AIR BAGS



30K pound rated large diameter air bags are standard. This allows for lower operating pressure and higher capacity when needed.

## DECKING OPTIONS



**Oak:** Standard.  
**Apitong:** Best strength to weight ratios of natural woods.  
**Rumber:** Composite which is impervious to fluids, mud, oil and UV rays.

## COLOR CODED HOSES



Color coded air hoses allow for easy trouble shooting and maintenance.



## STEMCO WHEEL WARRANTY



5 year wheel end warranty. Guardian wheel seals, Pro-Torq spindle nuts and Sentinel hub caps.

## LIGHTING SYSTEM




All Lighting is LED and mounted in rubber grommets to DOT standards.

## LANDING GEAR



2 speed Landing Gear, allows for 160,000 lbs static load.

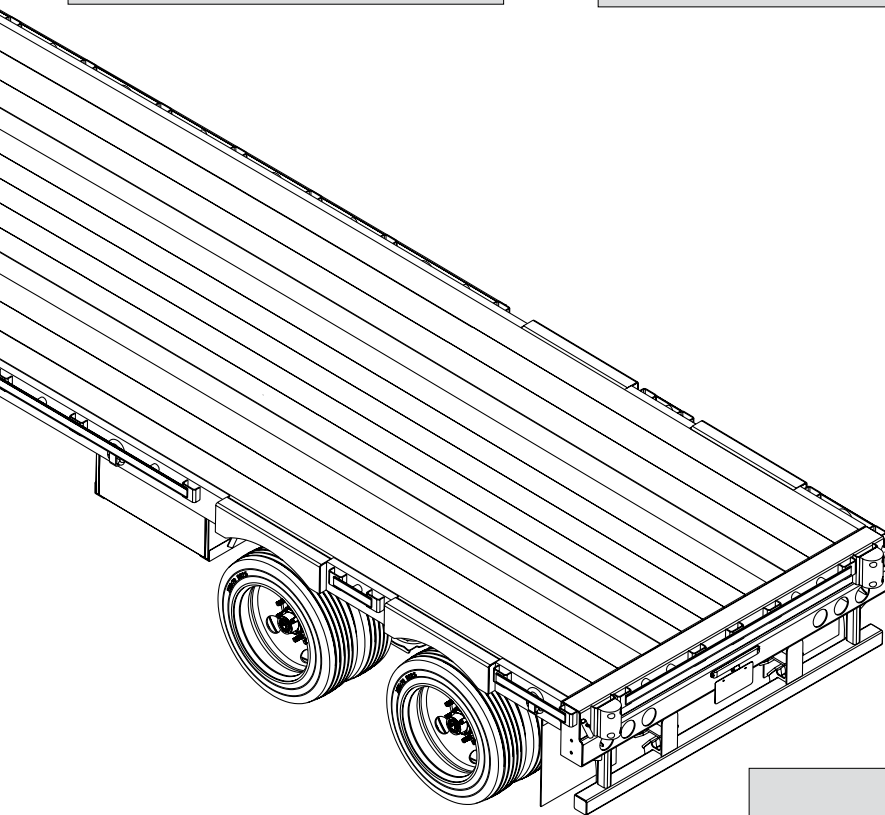

## POLYURETHANE VS RUBBER BUSHING



Reduced Maintenance	Increased Maintenance
Increased Trailer Lifetime	Needs Replacement
Increased Trailer Performance	Reduces Trailer Performance
Weather Resistant	Damaged from Weather


## COLOR OPTIONS



Globe Trailers can powder coat to the color of your choice.



All Globe Trailers are 100% powder coat finished. The entire process takes place at Globe's manufacturing facility. This eliminates the possibility of contamination occurring in transit between process phases. The process starts with sandblasting the trailer to near white, preheating the trailer steel in a dedicated, gas fired oven to optimum bonding temperature and applying an electrostatically charged zinc rich primer. The trailer then goes back in the oven to allow the primer to bond. After the primer has bonded, a top coat chosen from one of Globe Trailers' 188 color options is applied before once more going back in the oven to cure. The result is a durable, easily cleaned finish that protects the trailer from corrosion and ensures a long service life.

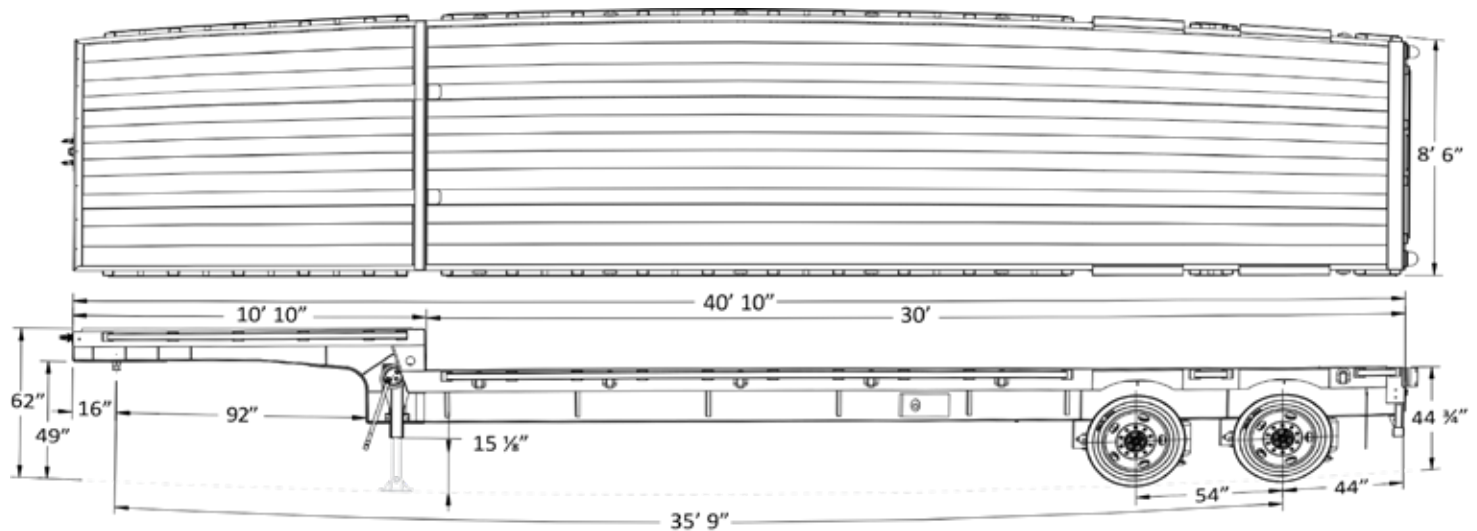

**Trailer Model: GTFS402-41-30-H**

**Weight: Apx. : 12670 ± lbs**

Overall Length	Overall Width	Gooseneck Length	Lower Deck Length	Lower Deck Height	Ground Clearance
40' 10"	8' 6"	10' 10"	30'	44 ¾"	15 ⅛"

Main Deck	
Main Frame	100 KSI Flanges and Webs
Centers	42" Standard
Crossmembers	4 on 12" Centers
# Of D-Rings	6 Each Side
Concentrated Load	80,000 lbs in 12'
Neck	Full Width
Stake Pockets	24" Center, Both sides, Front and Rear with Rubrails
Decking/Flooring	
Main Decking	1 ¾", Apitong Flooring
Electrical	
Lights	LED Plus 2 - Rear Strobes
Connector	7 Way Connector
Tires & Rims	
Tires	255/70R x 22.5"H"
Rims	8.25 x 22.5 10 Hole Hub Piloted Steel
Finish	
Sandblast & Powder Coat	
Mud Flaps & Reflective Tape	
Flag Holders	

Axles, Suspension, & Running Gear	
# of Axles	2
Axle Spacing	54"
Axle Capacity	25,000 lbs
Brakes	16 ½ X 7" - 25K
ABS	2S1M
Axle 1	Fixed Type 30/30
Axle 2	Fixed Type 30/30 ABS
17" Travel, 2-Speed Landing Gear	
Air Ride Suspension, Manual Dump Valve	
Gooseneck	
King Pin Style	Fixed
King Pin Setting	16"
Swing Clearance	92"
5th Wheel Height	49"
King Pin	2"

**Dealer:**