DLA Contract
SPE8EC-19-D-0039

GSA Contract
GS-30F-0027R

FLAT BED, 40 TON

40FB037907

PRD: 00037907 A.1

FLAT BED, 40 TON

2 AXLE, MAXIMUM PAYLOAD 80,000 LBS

Powdercoated by GLOBE TRAILERS

Flat Bed, 40 Ton

Features & Benefits

High Quality Steel

Constructed with T-1 100K PSI yield strength steel. The high-tensile steel ensures the designed camber is retained and allows for a longer product service life.

Landing Gear

2 speed Landing Gear, allows for 160,000 lbs static load.

Suspension

Heavy Duty tandem suspension.

Rear Bumper

DOT certified rear under ride bumper with high visibility reflective tape and rubber docking bumpers.

Web Winches

Web winches can be located on either side to secure loads and objects on the trailer.

Color Coded Hoses

Color-coded air hoses allow for easy troubleshooting and maintenance.

Wheel Options

All Globe trailers come with standard hub-piloted disc wheels. All-aluminum wheels and aluminum outer wheels are also available.

Lockable Tool Box

Optional Lockable Tool Box Mounted Underside of Main Deck, 24" x 24" x 48" Steel, can be located on either side.

Wide Turn Signals

Optional wide turn indicators available.

Flat Bed, 40 Ton

Features & Benefits

Decking Options

Oak: Standard. Apitong: Best strength-to-weight ratios among natural woods. Rumber: A composite impervious to fluids, mud, oil and UV rays.

Head Rack

Optional detachable steel bulkhead, 48″ high with optional work lights.

STEMCO Wheel Warranty

5-year wheel-end warranty. Guardian wheel seals, Pro-Torq spindle nuts and Sentinel hub caps.

Rub Rail

2 ½″ rolled formed steel. 6″ Structural Channel @ 6.5 lbs/ft, 5/16″ Thick Stake Pockets 1 5/8″ x 3 ½″ x ¼″, 24″ O/C, ¼″ x 3″ Rub rail.

Color Options

Globe Trailers can powder coat to the color of your choice.

Lighting System

All lighting is LED and mounted in rubber grommets to DOT standards.

Polyurethane vs Rubber Bushing

Reduced Maintenance	Increased Maintenance
Increased Trailer Lifetime	Needs Replacement
Increased Trailer Performance	Reduces Trailer Performance
Weather Resistant	Damaged from Weather

Powdercoated by GLOBE TRAILERS

All Globe Trailers are 100% powder-coat finished. The entire process takes place at Globe's manufacturing facility. This eliminates the possibility of contamination occurring in transit between process phases. The process starts with sandblasting the trailer to near white, preheating the trailer steel in a dedicated, gas-fired oven to optimum bonding temperature and applying an electrostatically charged zinc-rich primer. The trailer then goes back in the oven to allow the primer to bond. After the primer has bonded, a topcoat chosen from one of Globe Trailers' 188 color options is applied before the trailer returns to the oven to cure. The result is a durable, easily cleaned finish that protects the trailer from corrosion and ensures a long service life.

FLAT BED, 40 TON

40FB037907

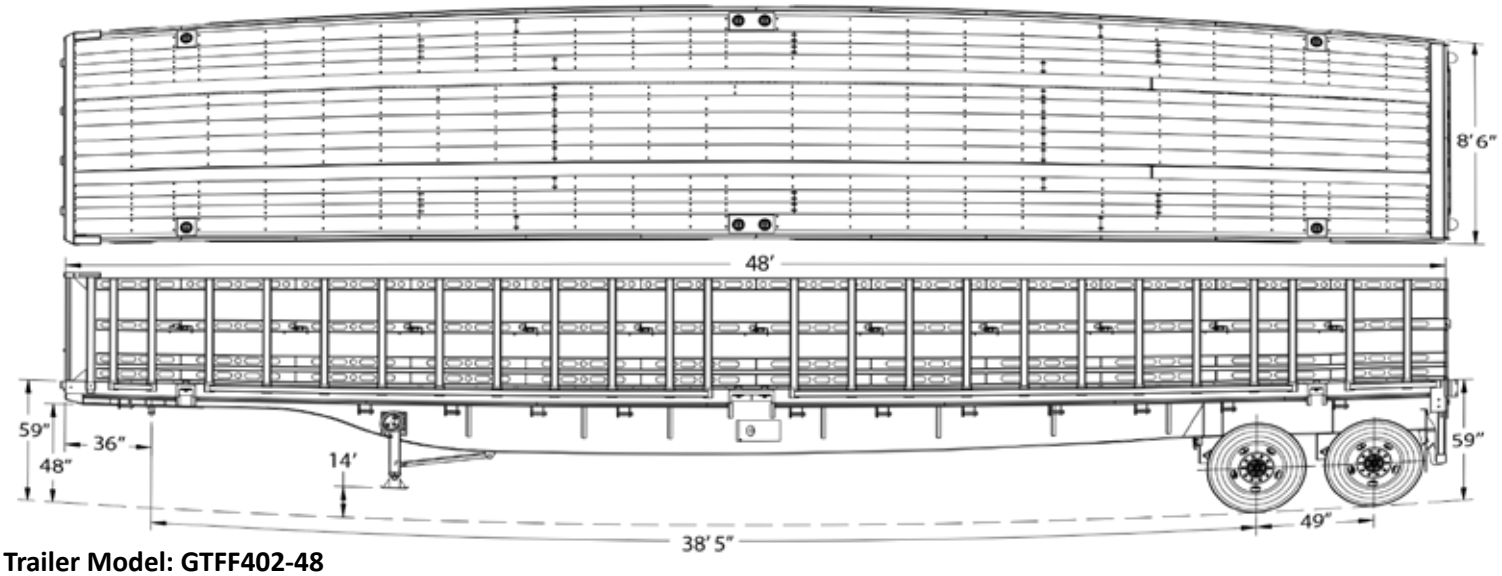

Trailer Model: GTFF402-48

Overall Length	Overall Width	5th Wheel Height	Front Deck Height	Rear Deck Height	Swing Clearance	Ground Clearance
48'	8' 6"	48" (Unloaded)	59" (Nominal)	59" (Nominal)	74"	14"

Main Deck	
Main Beam	100 KSI flanges and webs.
Centers	44" Standard
Side Rails	6" Structural Channel
Crossmembers	4" Jr. I-Beams on 8" Center
Stake Pockets	24" center, both sides, front & rear, with rubrails with double pipe spools
Decking/Flooring	
Main Decking	1 ⅜" Apitong Shiplap Flooring
Electrical	
Lights	LED Plus 2 - Rear Strobes
Connector	7-way Connector
Tires & Rims	
Tires	11R x 22.5 "H"
Rims	8.25 x 22.5 Hole Hub Piloted Steel
Finish	
Sandblast & Powder Coat	
Mud Flaps & Reflective Tape	
Options	
Twist locks set up for two - 20' Containers & one - 40' Container.	
Steel removable header rack 48" in height with chain storage.	
Sliding Winch track road side, and straps both sides.	
Mudflaps	

Axles, Suspension, & Running Gear	
# of Axles	2
Axle Spacing	49"
Axle Capacity	25,000lbs
Brakes	16 ½" x 7" - 25K
ABS	2S1M
Axle 1	Fixed Type 30/30 NON ABS
Axle 2	Fixed Type 30/30 ABS
Tandem air ride sliding suspension.	
2-Speed Landing Gear.	
King Pin and Swing Clearance	
King Pin Style	Fixed
King Pin Setting	36"
Swing Clearance	74"
5th Wheel Height	48"
King Pin	2" Heavy Duty

Dealer:

Globe Trailers | 3101 59th Ave Drive East, Bradenton, Florida 34203

1-800-800-3484 | www.globetrailers.com | sales@globetrailers.com