



DLA Contract  
SPE8EC-19-D-0039



GSA Contract  
GS-30F-0027R



SLIDING AXLE, 55TON

55SA258636



PRD: 00258636 A.1

# SLIDING AXLE SUSPENSION

3 AXLE, FIXED NECK,  
MAXIMUM PAYLOAD 110,000 LBS



WINCH SYSTEM



Available options for 10-45K lb hydraulic winch system. Mounted front and center of the upper deck. Standard cable length of 85' with shackle. Cable length options are available.

DECKING OPTIONS



**Oak:** Standard.  
**Apitong:** Best strength to weight ratios of natural woods.  
**Rumber:** Composite which is impervious to fluids, mud, oil and UV rays.

AIR BAGS



30,000 pound rated large diameter air bags are standard. This allows for lower operating pressure and higher capacity when needed.

SLIDING AXLE



Will handle heavy loads with a super low angle while maintaining superior stability during loading and unloading.

KEY HOLES FOR TIE DOWNS



Single slotted key holes gives you more tie-down angles for securing load.

STEMCO WHEEL WARRANTY



5 year wheel end warranty. Guardian wheel seals, Pro-Torq spindle nuts and Sentinel hub caps

STORAGE COMPARTMENT



Flush mounted compartments to store your loose items.

HIGH QUALITY STEEL



Constructed with T-1 100K PSI yield strength Steel. The High Tensile Steel ensures the designed camber is retained, and allows for a longer product service life.

HYDRAULIC CONTROLS



Controls located on the driver side of the upper deck.

CONNECTIONS



The front side of the neck offers easy access for connections like hydraulics, electrical and air lines.

COLOR OPTIONS



Globe Trailers can powder coat to the color of your choice

HEAD RACK OPTION



Optional detachable steel bulkhead, 48" high with optional work lights.

PONY MOTOR




Gasoline 25 HP Pony Motor provides hydraulic operation when disconnected from the trucks wet line. Unit is self contained under the neck.

WHEEL OPTIONS




All Globe trailers come with standard HUB piloted disc wheels. Wheels are also available in all Aluminum or Outer Aluminum.

LOADING AND RETRACTED AXLE POSITION

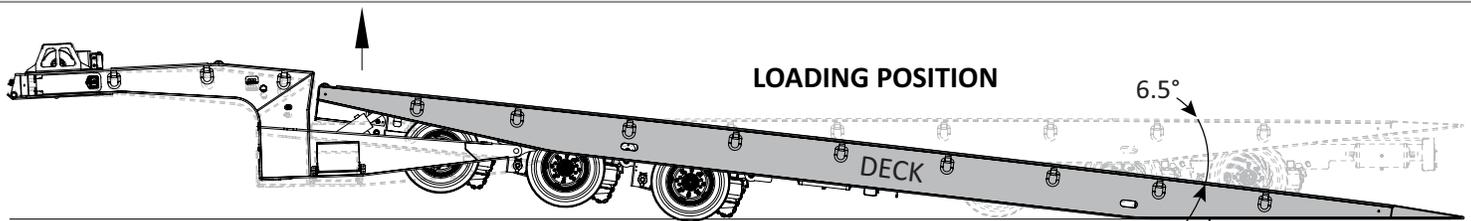

The axles travel forward and allow the deck to rise and allow for a very low 6.5 degree load position.

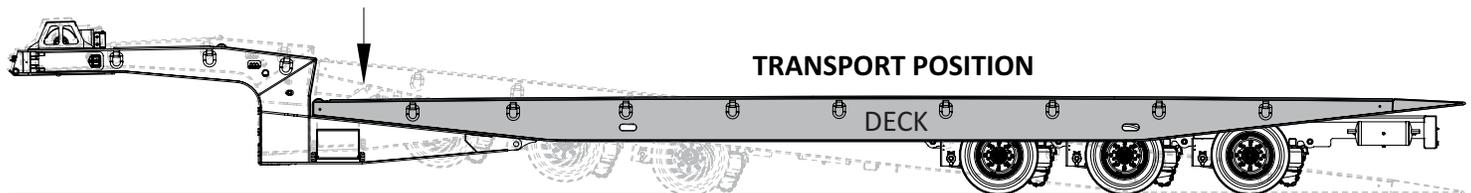

The axles are retracted to the rear of the trailer and locked into the transport position.


POLYURETHANE VS RUBBER BUSHING



Reduced Maintenance	Increased Maintenance
Increased Trailer Lifetime	Needs Replacement
Increased Trailer Performance	Reduces Trailer Performance
Weather Resistant	Damaged from Weather



All Globe Trailers are 100% powder coat finished. The entire process takes place at Globe's manufacturing facility. This eliminates the possibility of contamination occurring in transit between process phases. The process starts with sandblasting the trailer to near white, preheating the trailer steel in a dedicated, gas fired oven to optimum bonding temperature and applying an electrostatically charged zinc rich primer. The trailer then goes back in the oven to allow the primer to bond. After the primer has bonded, a top coat chosen from one of Globe Trailers' 188 color options is applied before once more going back in the oven to cure. The result is a durable, easily cleaned finish that protects the trailer from corrosion and ensures a long service life.

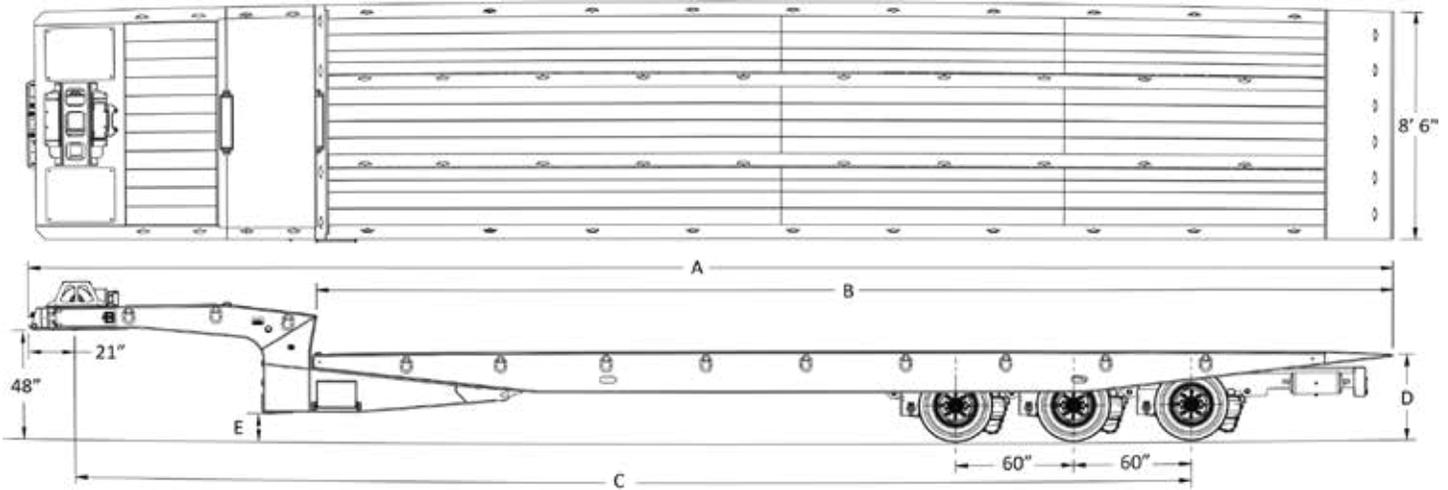

Trailer #	Model	Weight	A Overall Length	B Lower Deck Length	C Wheel Base	D Lower Deck Height	E Ground Clearance	Overall Width
455G-41	G TSA553-41-31	Apx. 16,820 ± lbs	41' (492")	31' (372")	32' 6" (390")	37 ½"	12 ½"	8' 6"
455G-48	G TSA553-48-38	Apx. 18,575 ± lbs	48' (576")	38' (456")	39' 9" (474")	36"	11 ½"	
455G-50CA	G TSA553-50-40	Apx. 23,010 ± lbs	50' (600")	40' (480")	42' 2" (506")	37"	11 ¾"	
455G-53	G TSA553-53-43	Apx. 24,485 ± lbs	53' (636")	43' (516")	44' 9" (534")			

Main Deck	
Main Frame	100,000 PSI Yield
Center	40" apx.
Crossmembers	3" Junior I-Beam on 8" Centers
Tie Downs	D-Rings, Chain Slots, Stake Pockets (optional)
Tool Boxes	Twin Side Mounted in Upper Deck with Lockable Doors.
Decking	1 ¾" Apitong
Load Angle : 6.5°	Dump Angle : 15°
Electrical	
Lights	LED Plus 2 - Rear Strobes
Connector	7 Way SAE Connector
Additional Options	
Electric Winch / Hydraulic Winch 10K-45K lbs	
Apitong, Oak Decking or Rumber Decking	
Head Rack, 36/48"	
Dock Levelers	
Oil Field Rollers	
Full Function remote control for Hydraulic and air functions.	
25 HP Back up Pony Motor / 25 HP Engine Mounted Over Winch with Cover	
Aluminum Rims	
Decal Advertising Package	
Traction Plate over approach plate	
Spare Tire & Carrier	
Undercoating Corro-guard	
Hubometer	
Halogen work Lamps	
Tire Inflation System	
Header with bolt on Chain Rack	
Rub Rail	

Axles, Suspension, & Running Gear	
# of Axles	3
Axle Spacing	60"
Axle Capacity	25,000lbs
Brakes	12 - ¼" x 7 ½" - 25K
ABS	4S2M
Axle 1	Fixed Type 30/30 Non-ABS
Axle 2	Fixed Type 30/30 ABS
Axle 3	Fixed Type 30/30 ABS
Air Ride Suspension	
Manual Dump Valve	
Jost Two Speed Landing Gear	
Centralized Grease System.	
Gooseneck	
King Pin Style	Fixed
King Pin Setting	21"
5th Wheel Height	48"
King Pin	2"
Swing Clearance	80"
Tires & Rims	
Tires	235/75R X 17.5 "H"
Rims	6.75 X 17.5 Hub Piloted Steel
Hydraulics	
Wet line to truck with quick couplers.	
Finish	
Sandblast & Powder Coat	
Flag Holders	

**Dealer:**