



TAG-A-LONG, 20 TON 20TA753669





TAG-A-LONG, 20 TON 2 AXLE, MAXIMUM PAYLOAD 40,000 LBS



TAG-A-LONG, 20 TON

FEATURES & BENEFITS





Constructed with T-1 100K PSI yield strength Steel. The High Tensile Steel ensures the designed camber is retained, and allows for a longer product service life.

WHEEL OPTIONS



All Globe trailers come with standard HUB piloted disc wheels. Wheels are also available in all Aluminum or Outer Aluminum.



D-rings on each side of the deck make it easier to secure loads to the trailer.



The Beavertail is an angled extension on the rear frame. This makes rear loading more convenient.

RAMPS



Adjustable with spring assist and safety bar.



25,000 lbs capacity axles.



2 speed Landing Gear, allows for 160,000 lbs static load.

COLOR OPTIONS



Globe Trailers can powder coat to the color of your choice.

LIGHTING SYSTEM



All Lighting is LED and mounted in rubber grommets to DOT standards.

STEMCO WHEEL WARRANTY



5 year wheel end warranty. Guardian wheel seals, Pro-Torq spindle nuts and Sentinel hub caps.

SUSPENSION



Heavy duty tandem-axle spring ride suspension.

TAG-A-LONG, 20 TON

FEATURES & BENEFITS



DECKING OPTIONS



Oak: Standard. Apitong: Best strength to weight ratios of natural woods. Rumber: Composite which is impervious to fluids, mud, oil and UV rays.





3" Pintle eye, with 4 adjustable height positions, with 2 heavy duty safety chains and grab hooks.

WARRANTY



Globe Trailer's 5 year structural warranty on all lowboys is the best in the industry. Most competitors offer only a 5 year warranty. This shows how committed Globe Trailers is to it's customers.

COLOR CODED HOSES



Color coded air hoses allow for easy trouble shooting and maintenance.

TOOL BOX

Lockable tool box with anti theft provisions available.

POLYURETHANE VS RUBBER BUSHING






All Globe Trailers are 100% powder coat finished. The entire process takes place at Globe's manufacturing facility. This eliminates the possibility of contamination occurring in transit between process phases. The process starts with sandblasting the trailer to near white, preheating the trailer steel in a dedicated, gas fired oven to optimum bonding temperature and applying an electrostatically charged zinc rich primer. The trailer then goes back in the oven to allow the primer to bond. After the primer has bonded, a top coat chosen from one of Globe Trailers' 188 color options is applied before once more going back in the oven to cure. The result is a durable, easily cleaned finish that protects the trailer from corrosion and ensures a long service life.





TAG-A-LONG, 20 TON 20TA753669

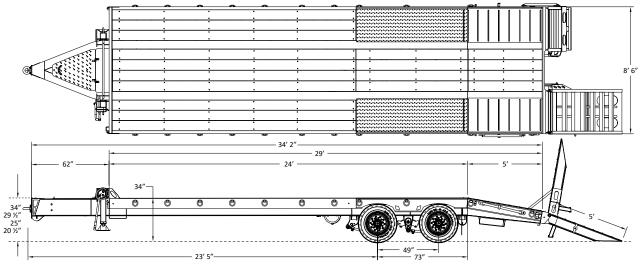

Trailer Model: GTTU202-35-24 Weight: Apx. : _____ ± lbs

Overall Length	Overall Width	Deck Length	Deck Height	Beavertail Length	Drawbar Length
34' 2"	8' 6"	24' TA	34"	60"	62 ½"

	Frame	Axles	Axles, Suspension, & Running Gear		
Main Beam	14 x 6.75 @ 30#	# of Axles	2		
Main Beam Centers	39"	Axle Spacing	49"		
Side Rails	8" Channel	Axle Capacity	25,000 lbs		
Crossmembers	4" Jr. I Beams	Brakes	116 ½" x 7" - 25K		
Spacing	12"				
Bumper	10" Channel	ABS	2S1M		
Header	8" Channel	Axle 1	Fixed Type 30/30 ABS		
# of D-Rings	11 Ea Side	Axle 2	Fixed Type 30/30 Non-ABS		
Drawbar		Suspension	Spring Ride 25K		
Tool Box	Lockable w/ Steel Grating	Landing Gear	Dual 2-Speed 50K Drop Leg Jacks - 17"		
Hitch Type	ch Type 3" Pintle Hitch		Tires & Rims		
Safety Chains with Ho	ooks	Tires	235/75R x 17.5 "H"		
Beavertail & Ramps		Rims	6.75 X 17.5 Hub Piloted Steel		
	Beavertail 60"		Finish		
	Rear Ramps 36" x 60"				
	Air Powered, Cleated	S	Sandblast and Powder Coat		
	Electrical	N	Mud Flaps & Reflective Tape		
Lights	hts LED Plus 2 - Rear Strobes		Flag Holders		
Connector	nnector 7 Way Connector		Dealer:		
	Decking/Flooring				
Main Decking	1.75", Apitong Full Width				
Beavertail Flooring	Steel Covered S-Plate w/Grousers				