







PRD: 00799405 A.1



# TAG-A-LONG, 30 TON 3 AXLE, MAXIMUM PAYLOAD 60,000 LBS



## FEATURES & BENEFITS



#### **HIGH QUALITY STEEL**



Constructed with T-1 100K PSI yield strength Steel. The High Tensile Steel ensures the designed camber is retained, and allows for a longer product service life.

#### WHEEL OPTIONS



All Globe trailers come with standard HUB piloted disc wheels. Wheels are also available in all Aluminum or Outer Aluminum.

#### **TIE DOWNS**



D-rings on each side of the deck make it easier to secure loads to the trailer.

#### **HYDRAULIC RAMPS**



Hydraulic ramp upgrade available for easier use.

#### **BEAVER TAIL**



The Beavertail is an angled extension on the rear frame. This makes rear loading more convenient.

### **AXLES**



25,000 lbs capacity axles.

#### LANDING GEAR



2 speed Landing Gear, allows for 160,000 lbs static load.

#### **COLOR OPTIONS**




Globe Trailers can powder coat to the color of your choice.

#### **LIGHTING SYSTEM**



All Lighting is LED and mounted in rubber grommets to DOT standards.

#### **STEMCO WHEEL WARRANTY**



5 year wheel end warranty. Guardian wheel seals, Pro-Torq spindle nuts and Sentinel hub caps.

#### **SUSPENSION**



Heavy duty tandem-axle spring ride suspension.

## FEATURES & BENEFITS



#### **DECKING OPTIONS**



Oak: Standard. **Apitong**: Best strength to weight ratios of natural woods. **Rumber**: Composite which is impervious to fluids, mud, oil and UV rays.

#### **TOOL BOX**



Lockable tool box with anti theft provisions available.

#### **HEAVY DUTY PINTLE EYE**



3" Pintle eye, with 4 adjustable height positions, with 2 heavy duty safety chains and grab hooks.

#### WARRANTY



Globe Trailer's 5 year structural warranty on all lowboys is the best in the industry. Most competitors offer only a 5 year warranty. This shows how committed Globe Trailers is to it's customers.

#### **COLOR CODED HOSES**



Color coded air hoses allow for easy trouble shooting and maintenance.

#### **POWER PACK**



Power pack option for rear hydraulic ramps.

#### POLYURETHANE VS RUBBER BUSHING



| Reduced Maintenance           | Increased Maintenance       |  |
|-------------------------------|-----------------------------|--|
| Increased Trailer Lifetime    | Needs Replacement           |  |
| Increased Trailer Performance | Reduces Trailer Performance |  |
| Weather Resistant             | Damaged from Weather        |  |




All Globe Trailers are 100% powder coat finished. The entire process takes place at Globe's manufacturing facility. This eliminates the possibility of contamination occurring in transit between process phases. The process starts with sandblasting the trailer to near white, preheating the trailer steel in a dedicated, gas fired oven to optimum bonding temperature and applying an electrostatically charged zinc rich primer. The trailer then goes back in the oven to allow the primer to bond. After the primer has bonded, a top coat chosen from one of Globe Trailers' 188 color options is applied before once more going back in the oven to cure. The result is a durable, easily cleaned finish that protects the trailer from corrosion and ensures a long service life.





## TAG-A-LONG, 30 TON

30TA799405

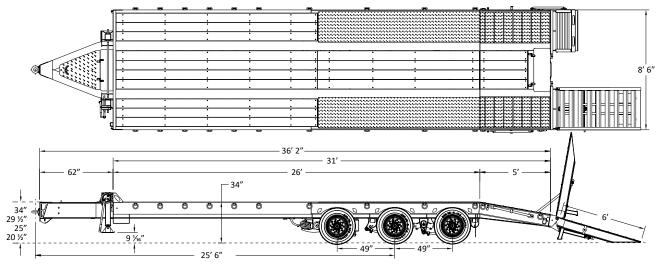

Trailer Model: GTTU303-37-26 Weight: Apx. : \_\_\_\_ ± lbs

| Overall Length | Overall Width | Deck Length | Deck Height | Beavertail Length | Drawbar Length |
|----------------|---------------|-------------|-------------|-------------------|----------------|
| 36′ 2″         | 8′ 6″         | 26' TA      | 34"         | 60"               | 62"            |

|                          | Frame                            |  |  |  |
|--------------------------|----------------------------------|--|--|--|
| Main Beam                | 14 x 6.75 @ 30#                  |  |  |  |
| Main Beam Centers        | 41"                              |  |  |  |
| Side Rails               | 10" Channel                      |  |  |  |
| Crossmembers             | 4" Jr. I Beams                   |  |  |  |
| Spacing                  | 12"                              |  |  |  |
| Bumper                   | 12" Channel                      |  |  |  |
| Header                   | 8" Channel                       |  |  |  |
| # of D-Rings             | 12 Ea Side                       |  |  |  |
| Drawbar                  |                                  |  |  |  |
| Tool Box                 | Lockable w/ Steel Grating        |  |  |  |
| Hitch Type               | 3" Pintle Hitch                  |  |  |  |
| Safety Chains with Hooks |                                  |  |  |  |
| Beavertail & Ramps       |                                  |  |  |  |
| Beavertail 60"           |                                  |  |  |  |
| Rear Ramps 36" x 72"     |                                  |  |  |  |
| Hydraulic, Cleated       |                                  |  |  |  |
| Electrical               |                                  |  |  |  |
| Lights                   | LED Plus 2 - Rear Strobes        |  |  |  |
| Connector                | 7 Way Connector                  |  |  |  |
|                          | Decking/Flooring                 |  |  |  |
| Main Decking             | 1.75", Apitong Full Width        |  |  |  |
| Beavertail Flooring      | Steel Covered D-Plate w/Grousers |  |  |  |

| Axles, Suspension, & Running Gear |                                       |  |  |  |
|-----------------------------------|---------------------------------------|--|--|--|
| # of Axles                        | 3                                     |  |  |  |
| Axle Spacing                      | 49"                                   |  |  |  |
| Axle Capacity                     | 25,000 lbs                            |  |  |  |
| Brakes                            | 12 ¼" x 7 ½" - 25K                    |  |  |  |
| ABS                               | 2S1M                                  |  |  |  |
| Axle 1                            | Super Lift Type 30 Non-ABS            |  |  |  |
| Axle 2                            | Fixed Type 30/30 ABS                  |  |  |  |
| Axle 3                            | Fixed Type 30/30 Non-ABS              |  |  |  |
| Suspension                        | Spring Ride 25K                       |  |  |  |
| Landing Gear                      | Dual 2-Speed 50K Drop Leg Jacks - 17" |  |  |  |
| Tires & Rims                      |                                       |  |  |  |
| Tires                             | 235/75R x 17.5 "H"                    |  |  |  |
| Rims                              | 6.75 X 17.5 Hub Piloted Steel         |  |  |  |
| Hydraulics                        |                                       |  |  |  |
| Self Contained                    |                                       |  |  |  |
| Electric/Hydraulic w/ Charge Kit  |                                       |  |  |  |
| Finish                            |                                       |  |  |  |
| Sandblast and Powder Coat         |                                       |  |  |  |
| Mud Flaps & Reflective Tape       |                                       |  |  |  |
| Flag Holders                      |                                       |  |  |  |
| Dealer:                           |                                       |  |  |  |