



TAG-A-LONG, 20 TON 20TA860852





TAG-A-LONG, 20 TON 2 AXLE, MAXIMUM PAYLOAD 40,000 LBS



TAG-A-LONG, 20 TON

FEATURES & BENEFITS





WHEEL OPTIONS



All Globe trailers come with standard HUB piloted disc wheels. Wheels are also available in all Aluminum or Outer Aluminum.



D-rings on each side of the deck make it easier to secure loads to the trailer.



Adjustable with air powered and safety bar.



The Beavertail is an angled extension on the rear frame. This makes rear loading more convenient.



25,000 lbs capacity axles.

COLOR OPTIONS



Globe Trailers can powder coat to the color of your choice.

LIGHTING SYSTEM



All Lighting is LED and mounted in rubber grommets to DOT standards.

STEMCO WHEEL WARRANTY



5 year wheel end warranty. Guardian wheel seals, Pro-Torq spindle nuts and Sentinel hub caps.

SUSPENSION



Heavy duty tandem-axle spring ride suspension.

TAG-A-LONG, 20 TON

FEATURES & BENEFITS



DECKING OPTIONS



Oak: Standard. Apitong: Best strength to weight ratios of natural woods. Rumber: Composite which is impervious to fluids, mud, oil and UV rays.



Lockable tool box with anti theft provisions available.

HEAVY DUTY PINTLE EYE



3" Pintle eye, with 4 adjustable height positions, with 2 heavy duty safety chains and grab hooks.

WARRANTY




Globe Trailer's 5 year structural warranty on all lowboys is the best in the industry. Most competitors offer only a 5 year warranty. This shows how committed Globe Trailers is to it's customers.

COLOR CODED HOSES



Color coded air hoses allow for easy trouble shooting and maintenance.



2 speed Landing Gear, allows for 160,000 lbs static load.

POLYURETHANE VS RUBBER BUSHING






All Globe Trailers are 100% powder coat finished. The entire process takes place at Globe's manufacturing facility. This eliminates the possibility of contamination occurring in transit between process phases. The process starts with sandblasting the trailer to near white, preheating the trailer steel in a dedicated, gas fired oven to optimum bonding temperature and applying an electrostatically charged zinc rich primer. The trailer then goes back in the oven to allow the primer to bond. After the primer has bonded, a top coat chosen from one of Globe Trailers' 188 color options is applied before once more going back in the oven to cure. The result is a durable, easily cleaned finish that protects the trailer from corrosion and ensures a long service life.





TAG-A-LONG, 20 TON 20TA860852

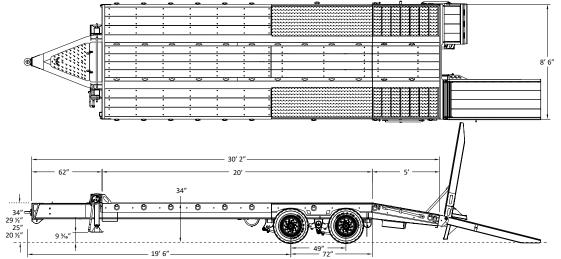

Trailer Model: GTTU202-20-30

Weight: Apx. : _____ ± lbs

Overall Length	Overall Width	Deck Length		Deck Height	Beavertail Length	Drawbar Length	
30' 2"	8' 6"	20' TA		34"	60"	62 ½"	
Frame				Axles, Suspension, & Running Gear			
Main Beam	14 x 6.75 @ 30#			# of Axles	2		
Main Beam Centers	41"			Axle Spacing	49"		
Side Rails	8" Channel			Axle Capacity	25,000 lbs		
Crossmembers	4" Jr. I Beams			Brakes	12 ¼" x 7 ½" - 25К		
Spacing	12"			ABS	2S1M		
Bumper	10" Channel			Axle 1	Fixed Type 30/30 ABS		
Header	8" Channel			Axle 2		Fixed Type 30/30 Non-ABS	
# of D-Rings	9 Ea Side			Suspension	Spring Ride 25K		
Drawbar				Landing Gear	Dual 2-Speed 50K Drop Leg Jacks - 17"		
Tool Box					Tires & Rims		
Hitch Type	3" Pintle Hitch			Tires	235/75R x 17.5 "H"		
Safety Chains with Hooks				Rims	6.75 X 17.5 Hub Piloted Outer Aluminum		
•				Hydraulics			
Beavertail & Ramps				Self Contained			
Beavertail 60"				Electric/Hydraulics w/Charge Kit			
Rear Ramps 36" x 84"				Finish			
Air Powered, Apitong Tread				Sandblast and Powder Coat			
Electrical				Mud Flaps & Reflective Tape			
Lights	LED Plus 2 - Rear	Strobes		Flag Holders			
Connector	Connector 7 Way Connector			Dealer:			
Decking/Flooring							
Main Decking	1.75", Apitong Fu	ll Width					
Beavertail Flooring	Steel Covered D-F	Plate w/Grousers					