



LOWBOY, 50 TON
50LB721183



PRD-00721183 A.1



LOWBOY, 50 TON
3 AXLE, DETACHABLE NON GROUND BEARING,
MAXIMUM PAYLOAD 100,000 LBS



AIR BAGS



30K pound rated large diameter air bags are standard. This allows for lower operating pressure and higher capacity when needed.

HYDRAULIC RAMPS




Hydraulic rear ramp upgrade available for easier use.

COLOR OPTIONS



Globe Trailers can powder coat to the color of your choice.

AIR TRANSITION RAMPS

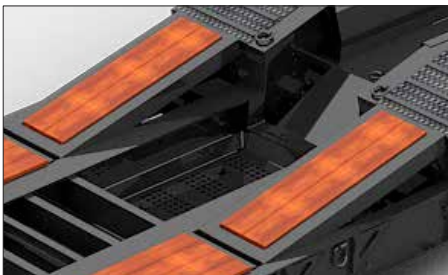

The Air Transition Ramps are recessed in the trailer deck and can quickly be activated to allow loading onto the upper deck.

22" DECK HEIGHT



With a standard deck height of 22", Globe Trailers have lower overall height, which allows taller loads to be hauled.

STEMCO WHEEL WARRANTY



5 year wheel end warranty. Guardian wheel seals, Pro-Torq spindle nuts and Sentinel hub caps.

HIGH QUALITY STEEL



Constructed with T-1 100K PSI yield strength Steel. The High Tensile Steel ensures the designed camber is retained, and allows for a longer product service life.

STANDARD FRONT RAMPS



Standard Steel Front ramps, for ease of front loading.

WARRANTY



Globe Trailer's 10 year structural warranty on all lowboys is the best in the industry. Most competitors offer only a 5 year warranty. This shows how committed Globe Trailers is to it's customers.

ADDED SECURITY



Globe Trailers air lock with safety bar and spring extended pin ensures that the gooseneck locking pin will

LIGHTING SYSTEM



All Lighting is LED and mounted in rubber grommets to DOT standards.

COLOR CODED HOSES



Color coded air hoses allow for easy trouble shooting and maintenance.

V-STYLE GUIDE



V-Style guide with front tapered beams helps position the gooseneck locking pin, which makes hooking up to a Globe Trailer fast and easy. The locking pin guide rim helps prevent the gooseneck locking pin from coming loose in transit.

MULTI POSITION RIDE HEIGHT



Multi Position Ride Height options. Makes adjustments for various 5th wheel heights easy and allows for larger ground clearance or lower deck height.

CENTRALLY LOCATED FITTINGS



Air, electric and hydraulic (when applicable) fittings are all centrally located at the base of the gooseneck inside a bolster. This makes for quick and easy connect and disconnect. The fittings are protected from possible contact with equipment being loaded or unloaded.

12" CROSS MEMBER SPACING



Standard 12" stubbed cross member spacing produces added strength to the trailer and also less stress on the decking, leading to a longer life of the decking material.

HEAVY DUTY FRONT OUTRIGGERS



Globe Trailers fabricated heavy duty pullout front outriggers provide added strength which is needed to accommodate the initial force when loading equipment. The outrigger is held in position with a spring loaded locking pin.

DECKING OPTIONS



Oak: Standard.
Apitong: Best strength to weight ratios of natural woods.
Rumber: Composite which is impervious to fluids, mud, oil and UV rays.


POLYURETHANE VS RUBBER BUSHING



| | |
|-------------------------------|-----------------------------|
| Reduced Maintenance | Increased Maintenance |
| Increased Trailer Lifetime | Needs Replacement |
| Increased Trailer Performance | Reduces Trailer Performance |
| Weather Resistant | Damaged from Weather |



All Globe Trailers are 100% powder coat finished. The entire process takes place at Globe's manufacturing facility. This eliminates the possibility of contamination occurring in transit between process phases. The process starts with sandblasting the trailer to near white, preheating the trailer steel in a dedicated, gas fired oven to optimum bonding temperature and applying an electrostatically charged zinc rich primer. The trailer then goes back in the oven to allow the primer to bond. After the primer has bonded, a top coat chosen from one of Globe Trailers' 188 color options is applied before once more going back in the oven to cure. The result is a durable, easily cleaned finish that protects the trailer from corrosion and ensures a long service life.

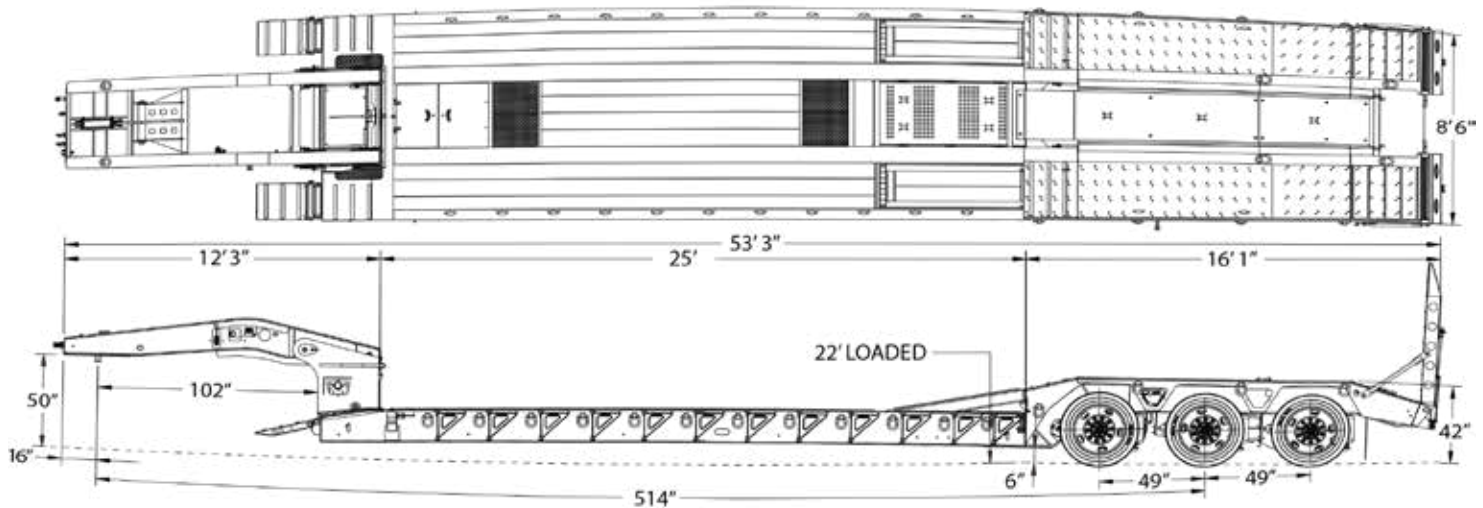

Trailer Model: GTBN503-53-25-GG

Weight: Apx. : 23940 ± lbs

| Overall Length | Overall Width | Gooseneck Length | Lower Deck Length | Lower Deck Height | Rear Deck Length | Rear Deck Height | Ground Clearance |
|----------------|---------------|------------------|-------------------|-------------------|------------------|------------------|------------------|
| 53' 3" | 8' 6" | 12' 3" | 25' | 22" Loaded | 16' 1" | 42" | 6" |

| Main Deck | |
|--------------------------------------|--|
| Main Beam | 16" T-1 Steel Std. |
| Centers | 40" Std. |
| Side Rails | 16" T-1 Steel |
| Crossmembers | 10" & 4" |
| Spacing | 12" |
| Outriggers | Full Height Removable |
| # Of D-Rings | 12 Each Side |
| Front Ramps | Steel, 18" X 31" Standard. |
| Concentrated Load | 100,000 lbs in 12' |
| Rear Deck | |
| Riser | 90° w/6' Air Transition Ramps |
| Rear Well Style | Boom & Bucket Style |
| # of D-Rings | 4 Each Side |
| Decking/Flooring | |
| Main Decking | 1.75" Apitong Full Width |
| Wheel Covers | Steel Covered D-Plate |
| Well Decking | Removable D-Plate - Full Length |
| Electrical | |
| Lights | LED Plus 2 - Rear Strobes |
| Connector | 7 Way Connector |
| Safety Night Light Package w/Battery | |
| Tires & Rims | |
| Tires | 255/70R x 22.5 "H" |
| Rims | 8.25 x 22.5 Hub Piloted Outer Aluminum |

| Axles, Suspension, & Running Gear | |
|---------------------------------------|----------------------------|
| # of Axles | 3 |
| Axle Spacing | 49" |
| Axle Capacity | 25,000 lbs |
| Brakes | 16 ½" x 7" - 25K |
| ABS | 2S1M |
| Axle 1 | Fixed Type 30/30 Non-ABS |
| Axle 2 | Fixed Type 30/30 ABS |
| Axle 3 | Super Lift Type 30 Non-ABS |
| Air Ride Suspension - 25K, Auto Dump. | |
| Gooseneck | |
| King Pin Style | Fixed |
| King Pin Setting | 16" |
| Swing Clearance | 102" |
| 5th Wheel Height | 50" |
| King Pin | 2" |
| Ride Height | 5-Position |
| Hydraulics | |
| Wet Line Kit - Wing Nut Connection | |
| Finish | |
| Sandblast & Powder Coat | |
| Mud Flaps & Reflective Tape | |
| Flag Holders | |

Dealer: