

Trailer Model: GTBN553-55-28-HGG

Weight: Apx. \_\_\_\_\_ ± lbs

Overall Length	Overall Width	Gooseneck Length	Lower Deck Length	Lower Deck Height	Rear Deck Length	Rear Deck Height	Ground Clearance
66' 1"	9'	13' 2"	25'	22" loaded	14' 3"	42 5/8"	6"

Main Deck			
Main Beam	16" T-1 Steel		
Centers	46" Standard		
Side Rails	16" T-1 Steel		
Crossmembers	10" & 4"	Spacing	12"
Outriggers	Full Height Removable		
# of D-Rings	12 each side		
Front Ramps	Steel 22" X 41"		
Concentrated Load	110,000 lbs in 12'		
Open storage in last 2 bays of main deck, front of the bucket pan			

Rear Deck	
Riser	90° w/6' Air Transition Ramps
Rear Well Style	Boom & Bucket Well
# of D-Rings	2 each side
Set up for hydraulic powered flip	

Decking/Flooring	
Main Decking	1.75", Apitong - Full Width
Wheel Covers	Apitong Covered
Well Decking	Open

Electrical	
Lights	LED Plus 2 - Rear Strobes
Connector	7 Way Connector
Additional	Safety Night Light Package w/Battery

Tires & Rims	
Tires	255/70R x 22.5 "H"
Rims	8.25 x 22.5 Hub Piloted Outer Aluminum

Hydraulics	
Wet Line Kit - Wing Nut Connection	

Axles, Suspension, & Running Gear	
# of Axles	3+1
Axle Spacing	54"
Axle Capacity	25,000 lbs
Brakes	16 1/2" x 7" - 25K
Axle 1	Fixed Type 30/30 Non-ABS
Axle 2	Fixed Type 30/30 Non-ABS
Axle 3	Super Lift Type 30 Non-ABS
Axle 4	Nitrogen Hydraulic Flip Stinger

Air Ride Suspension - 25K	
Manual Dump	

Gooseneck	
King Pin Style	Removable
King Pin Setting	16" & 40"
Swing Clearance	110" 86"
5th Wheel Height	50"
King Pin	2"
Ride Height	5 - Position

Finish	
Sandblast & Powder Coat	
Mud Flaps & Reflective Tape	
Flag Holders	

<b>Dealer:</b>
----------------

**MULTI POSITION RIDE HEIGHT**



Multi Position Ride Height options. Makes adjustments for various 5th wheel heights easy and allows for larger ground clearance or lower deck height.

**STEMCO WHEEL WARRANTY**



5 year wheel end warranty. Guardian wheel seals, Pro-Torq spindle nuts and Sentinel hub caps.

**LIGHTING SYSTEM**



All Lighting is LED and mounted in rubber grommets to DOT standards.

**AIR BAGS**




30K pound rated large diameter air bags are standard. This allows for lower operating pressure and higher capacity when needed.

**WARRANTY**



Globe Trailer's 10 year structural warranty on all lowboys is the best in the industry. Most competitors offer only a 5 year warranty. This shows how committed Globe Trailers is to it's customers.

**AIR TRANSITION RAMPS**

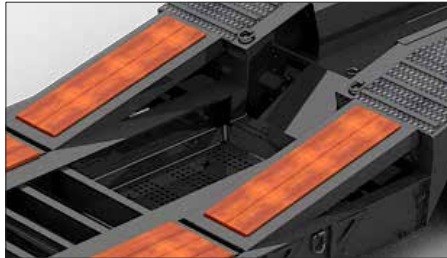

The Air Transition Ramps are recessed in the trailer deck and can quickly be activated to allow loading onto the upper deck.

**FRONT RAMPS**



Wood filled, adjustable, spring loaded Low angle paver ramps for easy loading onto the main deck.

**COLOR CODED HOSES**



Color coded air hoses allow for easy trouble shooting and maintenance.

**STINGER**



The Stinger Assembly increases the wheel base of the trailer when attached to the rear trailer frame. The Stinger Assembly is used for heavy hauling situations where regulations and specific axle loads must be adhered.

**DECKING OPTIONS**



**Oak:** Standard.  
**Apitong:** Best strength to weight ratios of natural woods.  
**Rumber:** Composite which is impervious to fluids, mud, oil and UV rays.

**22" DECK HEIGHT**



With a standard deck height of 22", Globe Trailers have lower overall height, which allows taller loads to be hauled.

**COLOR OPTIONS**



Globe Trailers can powder coat to the color of your choice.

**HIGH QUALITY STEEL**




Constructed with T-1 100K PSI yield strength Steel. The High Tensile Steel ensures the designed camber is retained, and allows for a longer product service life.

**V-STYLE GUIDE**



V-Style guide with front tapered beams helps position the gooseneck locking pin, which makes hooking up to a Globe Trailer fast and easy. The locking pin guide rim helps prevent the gooseneck locking pin from coming loose in transit.

**CENTRALLY LOCATED FITTINGS**

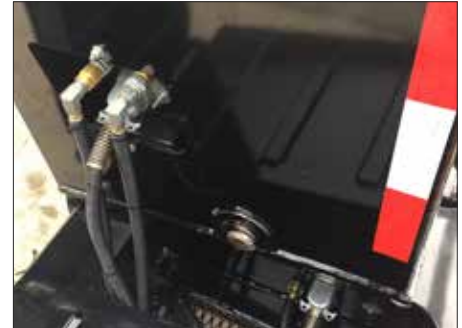


Air, electric and hydraulic (when applicable) fittings are all centrally located at the base of the gooseneck inside a bolster. This makes for quick and easy connect and disconnect. The fittings are protected from possible contact with equipment being loaded or unloaded.

**HEAVY DUTY FRONT OUTRIGGERS**



Globe Trailers fabricated heavy duty pullout front outriggers provide added strength which is needed to accommodate the initial force when loading equipment. The outrigger is held in position with a spring loaded locking pin.

**12" CROSS MEMBER SPACING**

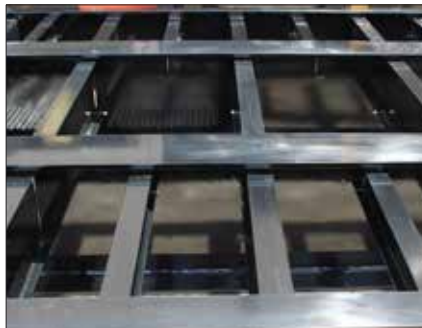

Standard 12" stubbed cross member spacing produces added strength to the trailer and also less stress on the decking, leading to a longer life of the decking material.

**ADDED SECURITY**



Globe Trailers air lock with safety bar and spring extended pin ensures that the gooseneck locking pin will remain secured even if air pressure is lost.

**POLYURETHANE VS RUBBER BUSHING**



Reduced Maintenance	Increased Maintenance
Increased Trailer Lifetime	Needs Replacement
Increased Trailer Performance	Reduces Trailer Performance
Weather Resistant	Damaged from Weather



All Globe Trailers are 100% powder coat finished. The entire process takes place at Globe's manufacturing facility. This eliminates the possibility of contamination occurring in transit between process phases. The process starts with sandblasting the trailer to near white, preheating the trailer steel in a dedicated, gas fired oven to optimum bonding temperature and applying an electrostatically charged zinc rich primer. The trailer then goes back in the oven to allow the primer to bond. After the primer has bonded, a top coat chosen from one of Globe Trailers' 188 color options is applied before once more going back in the oven to cure. The result is a durable, easily cleaned finish that protects the trailer from corrosion and ensures a long service life.