

# 65-Ton Lowboy - HGG



1-YEAR WARRANTY




NATIONWIDE SERVICE



## 65-Ton, 3 Axle, Detachable Non-Ground Bearing, Lowboy Trailer

This Specification is for a Model GTBN653-53-26-HGG, 65-Ton, 3 Axle, Detachable Non-Ground Bearing, Lowboy Trailer. Max Payload is 130,000 lbs in 12' Load Concentration and a Shipping Weight of 23,000 lbs +/- 3%.

<b>Overall Length:</b>	52' 8" (632")	<b>Main Beam:</b>	16" fabricated T-1 "I" beam, 100,000 PSI.
<b>Overall Width:</b>	8' 6" (102")	<b>Cross Member:</b>	10" Jr. "I" beams on 12" Centers
<b>Gooseneck:</b>	12' 0" (144")	<b>Side Rails:</b>	16" fabricated T-1 "I" beam, 100,000 PSI.
<b>Swing Clearance:</b>	98"	<b>Rear Tail:</b>	14" fabricated T-1 "I" beam, 100,000 PSI.
<b>Load well Length:</b>	26' 0" (312")	<b>Axles:</b>	Three (3) ea 25,000 lbs capacity axles, 3rd axle lift.
<b>Rear Deck:</b>	14' 8" (176")	<b>King Pin:</b>	2" heavy duty
<b>5th Wheel Height:</b>	50"	<b>Tires:</b>	12 ea 275/70R x 22.5 "H" load range, steel belted radials.
<b>King Pin Setting:</b>	16"	<b>Wheels:</b>	12 ea. 8.25 x 22.5, 10 hole hub piloted steel disc wheels.
<b>Ground Clearance:</b>	8"	<b>Brakes:</b>	16.5 x 7 air brakes w/ spring parking brake on middle axle
<b>Deck Height:</b>	24"		Auto slack adjusters, & 2S1M ABS system on 2nd axle.
<b>Axle Spacing:</b>	54"		

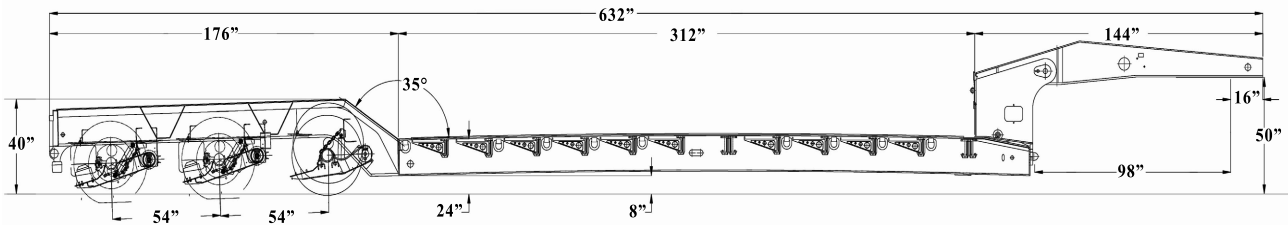

<b>Suspension:</b>	30K Cush air ride yoke mount suspension, 3rd axle air lift, with auto dump valve, & +/- 3 air ride adjustment.
<b>Front Ramps:</b>	31" double hinged front loading flip ramps with grousers.
<b>Rear Tail Section:</b>	Open wheel with boom & bucket well, set up for 4th axle/stinger
<b>Electrical:</b>	12-Volt electrical system with 7 way SAE connector, All lights LED mounted in rubber grommets to DOT standards.
<b>Hydraulics:</b>	Wet line hook-up on trailer for tractor PTO operation.
<b>Operating Pressure:</b>	Wet kit system requires 3000PSI at 10 GPM maximum flow to lift load at full capacity.
<b>Decking:</b>	1 3/4" apitong flooring, open center, secured to frame with 5/16" self-taping torque screws.
<b>Tie Downs:</b>	16 ea "D" Ring tie downs 6 ea side on main deck, 2 on rear deck.
<b>Out Riggers:</b>	30 ea removable outriggers with double up front and double in middle of load well, 15 ea Side.
<b>Finish:</b>	Powdercoated to color of choice.

LOWBOY