







PRD: 00598434 A.1



# TAG-A-LONG, 20 TON 2 AXLE, MAXIMUM PAYLOAD 40,000 LBS



### FEATURES & BENEFITS



#### **HIGH QUALITY STEEL**



Constructed with T-1 100K PSI yield strength Steel. The High Tensile Steel ensures the designed camber is retained, and allows for a longer product service life.

#### **WHEEL OPTIONS**



All Globe trailers come with standard HUB piloted disc wheels. Wheels are also available in all Aluminum or Outer Aluminum.

#### **TIE DOWNS**




D-rings on each side of the deck make it easier to secure loads to the trailer.

#### **WARRANTY**



Globe Trailer's 5 year structural warranty on all lowboys is the best in the industry. Most competitors offer only a 5 year warranty. This shows how committed Globe Trailers is to it's customers.

#### **STEMCO WHEEL WARRANTY**



5 year wheel end warranty. Guardian wheel seals, Pro-Torq spindle nuts and Sentinel hub caps.

# AXLES

25,000 lbs capacity axles.

#### **POWER PACK**



Power pack option for rear hydraulic ramps.

#### **COLOR OPTIONS**



Globe Trailers can powder coat to the color of your choice.

#### **LANDING GEAR**



2 speed Landing Gear, allows for 160,000 lbs static load.

#### **SUSPENSION**




Heavy Duty tandem suspension.

#### **FEATURES & BENEFITS**



#### **DECKING OPTIONS**



Oak: Standard.
Apitong: Best strength to weight ratios of natural woods.
Rumber: Composite which is impervious to fluids, mud, oil and UV rays.

#### **TOOL BOX**



Lockable tool box with anti theft provisions available.

#### **COLOR CODED HOSES**



Color coded air hoses allow for easy trouble shooting and maintenance.

#### **LIGHTING SYSTEM**



All Lighting is LED and mounted in rubber grommets to DOT standards.

#### **HEAVY DUTY PINTLE EYE**



3" Pintle eye, with 4 adjustable height positions, with 2 heavy duty safety chains and grab hooks.

#### **RAMPS**



Adjustable with Hydraulic assist and safety bar.

#### **POLYURETHANE VS RUBBER BUSHING**



Reduced Maintenance	Increased Maintenance
Increased Trailer Lifetime	Needs Replacement
Increased Trailer Performance	Reduces Trailer Performance
Weather Resistant	Damaged from Weather




All Globe Trailers are 100% powder coat finished. The entire process takes place at Globe's manufacturing facility. This eliminates the possibility of contamination occurring in transit between process phases. The process starts with sandblasting the trailer to near white, preheating the trailer steel in a dedicated, gas fired oven to optimum bonding temperature and applying an electrostatically charged zinc rich primer. The trailer then goes back in the oven to allow the primer to bond. After the primer has bonded, a top coat chosen from one of Globe Trailers' 188 color options is applied before once more going back in the oven to cure. The result is a durable, easily cleaned finish that protects the trailer from corrosion and ensures a long service life.





## TAG-A-LONG, 20 TON

20TA598434

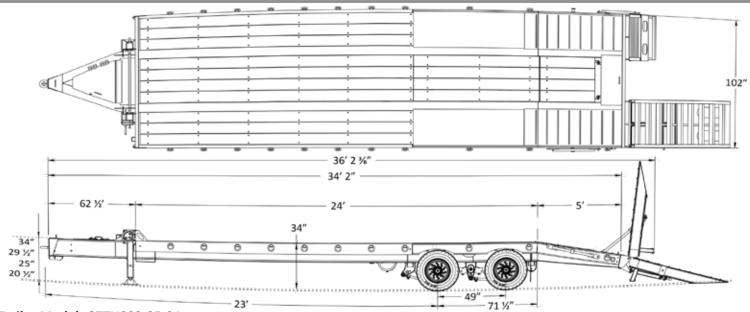

Trailer Model: GTTU202-35-24 Weight: Apx. : 10380 ± lbs

Overall Length	Overall Width	Deck Length	Deck Height	Drawbar Length	
34′ 2″	102"	24'	34" LOADED	62 ½"	

Frame					
Main Beam	14 x 6.75 @30#				
Main Beam Centers	Beam Centers 39"				
Side Rails	8" Channel				
Crossmembers	4" IB				
Spacing	12"				
Bumper	10" Channel				
Header	8" Channel				
# of D-Rings	11 Ea Side				
Drawbar					
Tool Box	Lockable w/ Steel Grating				
Hitch Type	litch Type 3" Pintle Hitch				
Safety Chains with Hoo	Safety Chains with Hooks				
Beavertail & Ramps					
Beavertail 60"					
Rear Ramps 36" x 72"					
Hydraulic Ramps					
Cleated					
Electrical					
Lights	LED S/T/T Only				
Connector	7 Way Connector				
	Decking/Flooring				
Main Decking	1.75", Oak Full Width				
Beavertail Flooring	Steel Covered S-Plate w/Grousers				

Axles, Suspension, & Running Gear				
# of Axles	2			
Axle Spacing	49"			
Axle Capacity	25,000 lbs			
Brakes	12 ¼" x 7 ½" - 25K			
ABS	2S1M			
Axle 1	Fixed Type 30/30 ABS			
Axle 2	Fixed Type 30/30 Non-ABS			
Suspension	Spring Ride 25K			
Landing Gear	Dual 2-Speed 50K Drop Leg Jacks - 17"			
Tires & Rims				
Tires	215/75R x 17.5 "H"			
Rims	6.75 X 17.5 Hub Outer Aluminum			
Finish				
Sandblast and Powder Coat				
Mud Flaps & Reflective Tape				

Dealer: