



**DROP DECK, 40 TON**  
**40DP919945**



PRD: 00919945 A.1



**DROP DECK, 40 TON**  
2 AXLE, MAXIMUM PAYLOAD 80,000 LBS



## HIGH QUALITY STEEL



Constructed with T-1 100K PSI yield strength Steel. The High Tensile Steel ensures the designed camber is retained, and allows for a longer product service life.

## STEMCO WHEEL WARRANTY



5 year wheel end warranty.  
Guardian wheel seals, Pro-Torq spindle nuts and Sentinel hub caps.

## COLOR OPTIONS



Globe Trailers can powder coat to the color of your choice

## REAR BUMPER



DOT certified rear under ride bumper with high visibility reflective tape and rubber docking bumpers.

## WEB WINCHES



Web winches are welded on, located on the road side. Used to retain loads and objects on the trailer.

## WHEEL OPTIONS



All Globe trailers come with standard HUB piloted disc wheels. Wheels are also available in all Aluminum or Outer Aluminum.

## RUB RAIL



2 ½" rolled formed steel. 6" Structural Channel @ 6.5 lbs/ft, 5/16" Thick Stake Pockets 1 5/8" x 3 ½" x ¼", 24" O/C, ¼" x 3" Rub rail.

## LOCKABLE TOOL BOX



Optional Lockable Tool Box Mounted Underside of Main Deck, 24" x 24" x 48" Steel, can be located on either side.

## WIDE TURN SIGNALS



Optional wide turn indicators available.

## LIGHTING SYSTEM



All Lighting is LED and mounted in rubber grommets to DOT standards.

## DECKING OPTIONS



**Oak:** Standard.

**Apitong:** Best strength to weight ratios of natural woods.

**Rumber:** Composite which is impervious to fluids, mud, oil and UV rays.

## COLOR CODED HOSES



Color coded air hoses allow for easy trouble shooting and maintenance.

## SUSPENSION



Heavy Duty tandem suspension.


## POLYURETHANE VS RUBBER BUSHING



Reduced Maintenance	Increased Maintenance
Increased Trailer Lifetime	Needs Replacement
Increased Trailer Performance	Reduces Trailer Performance
Weather Resistant	Damaged from Weather



All Globe Trailers are 100% powder coat finished. The entire process takes place at Globe's manufacturing facility. This eliminates the possibility of contamination occurring in transit between process phases. The process starts with sandblasting the trailer to near white, preheating the trailer steel in a dedicated, gas fired oven to optimum bonding temperature and applying an electrostatically charged zinc rich primer. The trailer then goes back in the oven to allow the primer to bond. After the primer has bonded, a top coat chosen from one of Globe Trailers' 188 color options is applied before once more going back in the oven to cure. The result is a durable, easily cleaned finish that protects the trailer from corrosion and ensures a long service life.

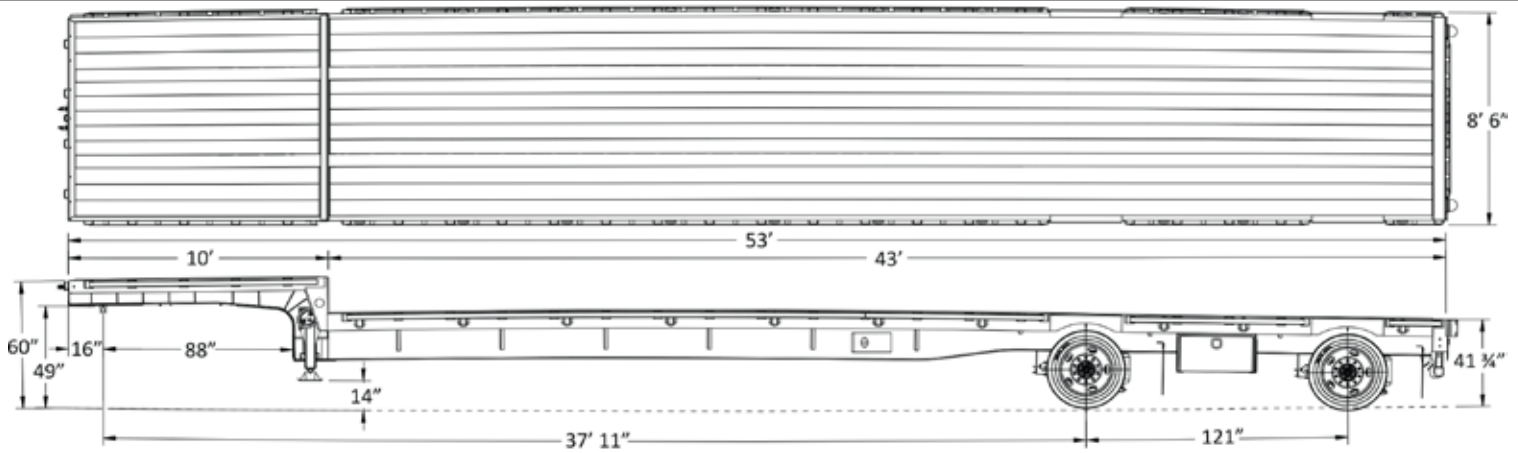

Trailer Model: GTFV402-53-43

Weight: \_\_\_\_\_ ± lbs

Overall Length	Overall Width	Gooseneck Length	Front Deck Height	Rear Deck Height	Load Well Length	Ground Clearance
53'	8' 6"	10'	60"	41 ¾"	43'	14"

Main Deck	
Main Beam	100 KSI flanges and webs.
Centers	41"
Side Rails	Structural Steel Channel
Crossmembers	4" Jr. I Beams
Web Winches	10 Per Side
Tool Box under the main deck	
D Rings 10 on each side	
Decking/Flooring	
Main Decking	1.75" Apitong
Wheel Covers	Steel Covered
Well Decking	Covered
Electrical	
Lights	LED Plus 2 - Rear Strokes
Connector	7 Way SAE Connector
Tires & Rims	
Tires	255/70R x 22.5 "H"
Rims	8.25 x 22.5 Hub Piloted Steel
Additional	
Hubometer	
Twist Locks for 2 - 20' & 1 - 40'	

Axles, Suspension, & Running Gear	
# of Axles	2
Axle Spacing	121"
Axle Capacity	25,000lbs
Brakes	16 ½" x 7" - 25K
ABS	2S1M
Axle 1	Fixed Type 30/30 Non - ABS
Axle 2	Fixed Type 30/30 ABS
Air Ride Suspension - 25K & Dump Valve	
Gooseneck	
King Pin Style	Fixed
King Pin Setting	16"
Swing Clearance	88"
5th Wheel Height	49"
King Pin	2"
Finish	
Sandblast & Powder Coat	
Mud Flaps & Reflective Tape	
Flag Holders	
Wide Turn Indicators	

Dealer: